



# Contents

Introduction	i	Installation - Primelok Weatherboards	23
WeatherTex Product Range	1 - 3	Installation - Selflok Weatherboards	24
WeatherTex Accessories Range	4 - 7	Installation - Natural	25
Product Information	8 - 10	Installation - Wall Shingles	25
General Requirements - All Products	11 - 13	Installation - Weathergroove	26 - 27
Fasteners and Gun Nailing	14 - 17	Installation - ExteriorBoard/High ImpactBoard	28
Installation - Cavity Wall Systems	18 - 19	Installation - Rubix Panel	29 - 30
Joining Details	20 - 21	Warranty	31
Installation - Classic Weatherboards	22		

## Introduction

100% Australian made and owned, WeatherTex® Weatherboards and Architectural Panels are manufactured from native Australian hardwood timber. WeatherTex sources timber from sustainably managed forests and controlled sources audited under the Australian Forestry Standard (AFS) and Certified by PEFC: the world's largest forest certification scheme.

The unique manufacturing process at the WeatherTex Factory facilitates the production of highly durable, reconstituted exterior-grade cladding without the need for the hazardous chemical additives, crystalline silica, resins, binding agents or formaldehydes which are present in alternate light weight cladding products on the market. Not only does this allow offcuts and waste to be recycled as mulch or fuel, but is safe and easy for builders to cut and work without the need for specialty tools.

Underpinned by our 25 year guarantee not to rot, split or crack; WeatherTex proudly delivers natural, long-lasting timber products to customers in Australia and around the world. With a better than zero carbon footprint, WeatherTex strives to provide quality products which enable creative and sustainable design for the future.

Whether you are seeking external timber cladding for a renovation, extension, new home, or commercial application, WeatherTex® Weatherboards and Architectural Panels offer an endless variety of external timber cladding solutions.



\*applicable to specifically marked products in this guide.



# Weathertex Weatherboard Range

All Weathertex products have a thickness of 9.5mm. Weathertex products are pre-primed with an acrylic, water-based primer. The Natural Woodsman Range are available un-primed as an undressed raw timber finish.


## Weathertex Traditional Weatherboards

Weathertex Traditional Weatherboards include smooth and featured surface planks for lapped applications:

### Classic


3660mm x 200mm

3660mm x 300mm

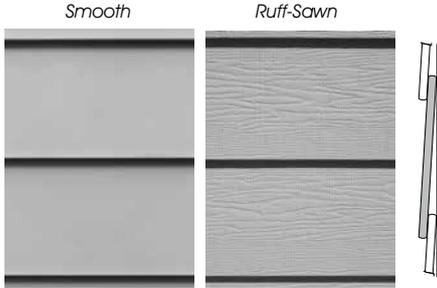

### Rusticated

3660mm x 200mm

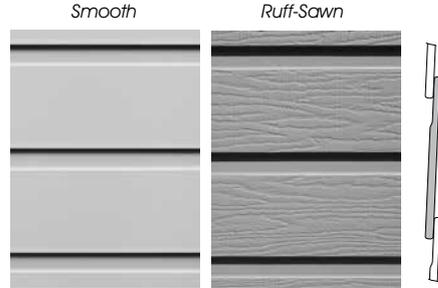


## Selflok Weatherboards

Selflok Weatherboards are routed during manufacturing with a self-locking feature to allow each board to accurately align above one another, providing a clean and neat finish. Semi-concealed fixing in many wind areas is also possible. Ecogroove Woodsman available un-primed.


### Millwood

3660mm x 300mm

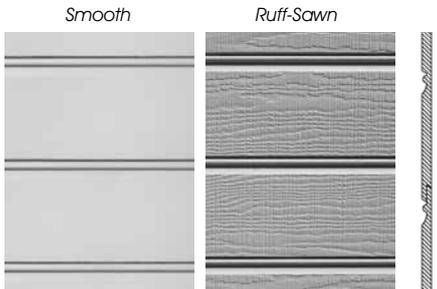

### Old Colonial

3660mm x 300mm

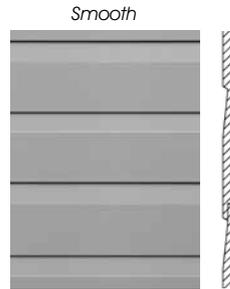

### Texwood

3660mm x 300mm



### Ecogroove 150\*


3660mm x 300mm



\* Refers to groove spacing.

### Ecogroove 300\*

3660mm x 300mm

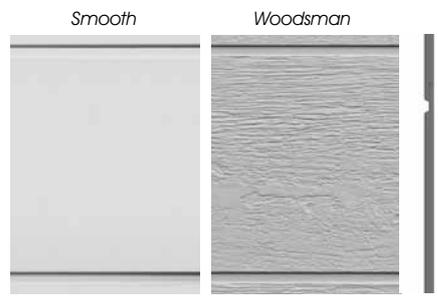


\* Refers to groove spacing.

# Primelok Weatherboards

Smooth and textured Primelok Weatherboards feature the Primelok® aligning spline for increased speed and accuracy when installing. The Primelok design allows for fixings to be fully concealed under the lap.


## Primelok 200

3660mm x 200mm

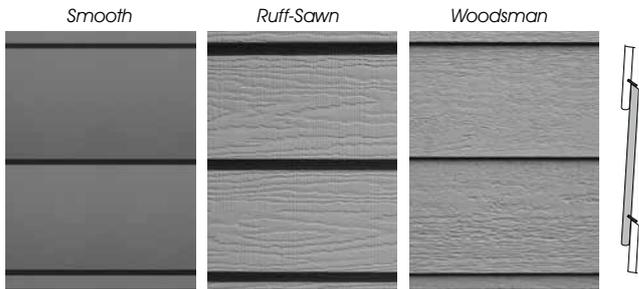


## Braidwood

3660mm x 200mm

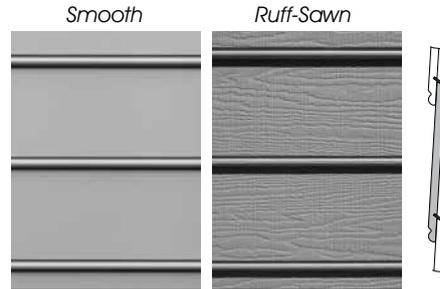

## Federation

3660mm x 170mm

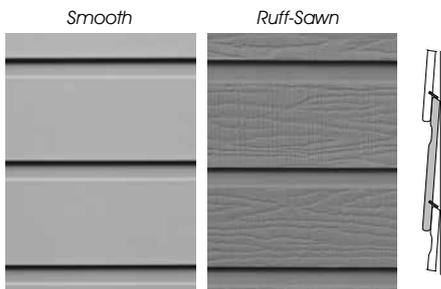

## Shadowood

3660mm x 170mm



# Weathertex Architectural Panel Range

## Weathergroove

Smooth, Ruff-Sawn or Woodsman textured Weathergroove Panels display regular vertical grooves. Rebated edges combine with Weathergroove joiners to provide a seamless finish. Able to be joined on or off-stud.

150 Smooth	300 Smooth	600 Smooth	1200 Smooth	150 Ruff-Sawn	150 Woodsman
3660mm x 1196mm 2745mm x 1196mm 2440mm x 1196mm	3660mm x 1196mm 2745mm x 1196mm 2440mm x 1196mm	3660mm x 1196mm 2745mm x 1196mm 2440mm x 1196mm			




# ExteriorBoard/High ImpactBoard

ExteriorBoard/High ImpactBoard offers a modern express join style by incorporating both vertical and horizontal express joins. Large panel sizes allow for quick installation and versatility.

Smooth



Woodsmen (3660 x 1220mm only)

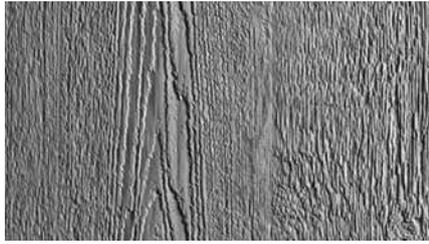


ExteriorBoard Sizes:  
3660mm x 1220mm  
2745mm x 1220mm  
2440mm x 1220mm



\*Refer to Weathertex Manufacturer's Warranty

# Rubix Panel

Rubix Panel is a self-locking Architectural Panel designed to be joined on or off stud without the need for joining accessories.

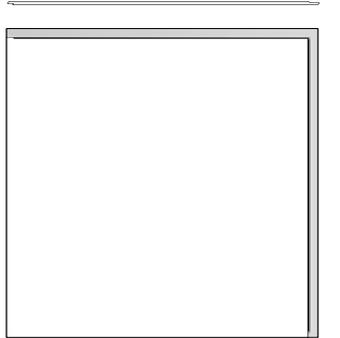


Sizes:  
1200mm x 1200mm  
1200mm x 900mm




\*Refer to Weathertex Manufacturer's Warranty

# Natural Range

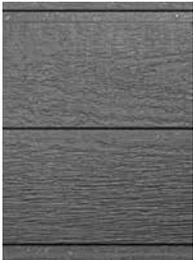


Ecogroove 150 ^  
Natural

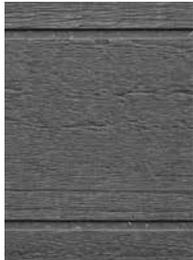


Ecogroove 300 ^  
Natural



Vgroove 150 ^  
Natural  
(MTO)

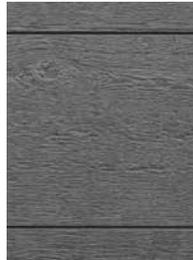

Vgroove 300 ^  
Natural  
(MTO)

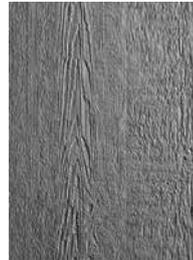

ExteriorBoard  
Natural  
(3660x1220mm only)



Weathergroove  
150 Natural  
(3660x1196mm only)



Weathergroove  
300 Natural  
(3660x1196mm only)

The Natural range offers a unique appearance with the characteristics and look of raw, undressed timber. The rough, deep cut woodsmen wood grain pattern imitates all the knots, cracks and imperfections of real timber.

The surface can be oiled to maintain the look of fresh brown timber; alternatively it can be left untreated and allowed to age naturally. When left untreated the surface will weather and grey subject to location and sun exposure similar to other natural timber products. Refer to the Painting and Maintenance Section for more details.


**NOTE:** Weathertex PVC joiners are not used with the natural range and alternate joining instructions are provided in the relevant installation sections.



\* Refer to Weathertex Manufacturer's Warranty




# Wall Shingles

Regular vertically grooved Ruff-Sawn Weatherboards for overlapping shingles effect. Notched lower edge. *Please note that wall shingles are supplied unprimed.*


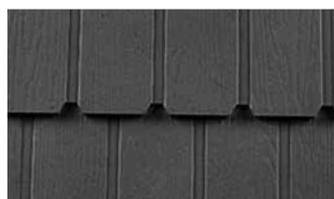


1195mm x 225mm

# Weathertex Accessories Range

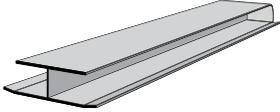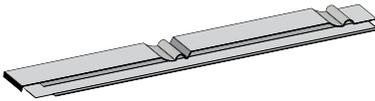PRODUCT	LENGTH (mm)	SUITED TO:	
CLASSIC OFF STUD JOINER	200 Smooth or Ruff-Sawn 300 Smooth	Classic 200mm Weatherboards Primelok Classic 200mm Classic 300mm Weatherboards	
RUSTICATED JOINERS	200 Smooth 200 Ruff-Sawn	Rusticated Smooth Rusticated Ruff-Sawn	
BRAIDWOOD JOINERS	200 Smooth 200 Ruff-Sawn	Primelok Braidwood Smooth Primelok Braidwood Ruff-Sawn	
FEDERATION JOINERS	170 Smooth 170 Ruff-Sawn	Primelok Federation Smooth Primelok Federation Ruff-Sawn	
SHADOWOOD JOINER	170 Smooth	Primelok Shadowood Smooth	
MILLWOOD JOINERS	300 Smooth 300 Ruff-Sawn	Selflok Millwood Smooth Selflok Millwood Ruff-Sawn	
OLD COLONIAL JOINER	300 Smooth	Selflok Old Colonial Smooth	
ECOGROOVE 150 JOINERS	300 Smooth 300 Woodsman	Selflok Ecogroove 150 Smooth Selflok Ecogroove 150 Woodsman	
ECOGROOVE 300 JOINERS	300 Smooth 300 Woodsman	Selflok Ecogroove 300 Smooth Selflok Ecogroove 300 Woodsman	
TEXWOOD JOINER	300 Smooth	Selflok Texwood Smooth	
SHINGLE JOINER	255	Weathertex Wall Shingles	
170MM CONCEALED JOINER	170	Primelok 170 Weatherboards	
200MM CONCEALED JOINER	200	Classic 200mm Weatherboards Primelok 200mm Weatherboards	
300MM CONCEALED JOINER	300	Selflok 300mm Weatherboards	






# Weathertex Accessories Range

PRODUCT	LENGTH (mm)	SUITED TO:	
PRIMELOK STARTER STRIP	1830	All Weathertex Primelok Weatherboards	
WEATHERGROOVE JOINERS	2440, 2745, 3660	Weathergroove	
PVC DEEP CHANNEL JOINER	3660	ExteriorBoard/High ImpactBoard	
SMALL CORNER PLUG		Traditional Small External Aluminium Corner	
LARGE CORNER PLUG		Traditional Large External Aluminium Corner	



CAVITY WALL SYSTEM				
SMALL CAVITY CLOSER	1830	$\alpha = 10$	Selflok Weatherboards, Weathergroove, ExteriorBoard/High ImpactBoard	
LARGE CAVITY CLOSER	1830	$\alpha = 20$	Classic 200 and 300mm Weatherboards, Primelok Weatherboards	
WEATHERTEX WRAPSHIELD		60m x 1350mm	All Weathertex Weatherboards and Architectural Panels	
CAVITY BATTENS		1220mm x 45mm	All cavity constructions	

# Trimtec Accessories

- All Trimtec Accessories are made from anodised aluminium.

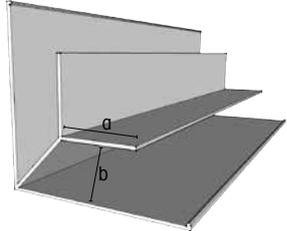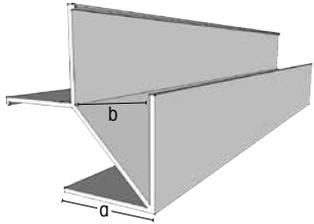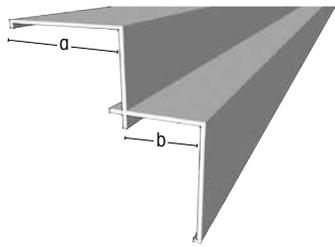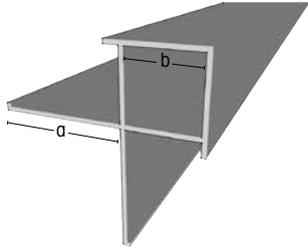PRODUCT	LENGTH (mm)	DIMENSION	SUITED TO:	
<b>LF ALUMINIUM CORNERS</b>				
SMALL INTERNAL LF ALUMINIUM CORNER	3660	a = 27 b = 11	Selflok Weatherboards, Weathergroove, ExteriorBoard/High ImpactBoard, Rubix	
LARGE INTERNAL LF ALUMINIUM CORNER	3000	a = 27 b = 21	Primelok Weatherboards, Rusticated, Classic Weatherboards	
SMALL EXTERNAL LF ALUMINIUM CORNER	3660	a = 27 b = 11	Selflok Weatherboards, Weathergroove, ExteriorBoard/High ImpactBoard, Rubix	
LARGE EXTERNAL LF ALUMINIUM CORNER	3000	a = 27 b = 21	Primelok Weatherboards, Rusticated, Classic Weatherboards	
SMALL WINDOW SURROUND	3660	a = 11	Selflok Weatherboards, Weathergroove, ExteriorBoard/High ImpactBoard, Rubix	
LARGE WINDOW SURROUND	3660	a = 21	Primelok Weatherboards, Rusticated, Classic Weatherboards	
WINDOW CORNER			Suited to finish corner junctions between window surrounds	
<b>TRADITIONAL ALUMINIUM CORNERS</b>				
SMALL INTERNAL ALUMINIUM CORNER	3660	a = 35 b = 11	Selflok Weatherboards, Weathergroove, ExteriorBoard/High ImpactBoard, Rubix	
LARGE INTERNAL ALUMINIUM CORNER	3000	a = 35 b = 21	Primelok Weatherboards, Rusticated, Classic Weatherboards	
SMALL EXTERNAL ALUMINIUM CORNER	3660	a = 35 b = 11	Selflok Weatherboards, Weathergroove, ExteriorBoard/High ImpactBoard, Rubix	
LARGE EXTERNAL ALUMINIUM CORNER	3000	a = 35 b = 21	Primelok Weatherboards, Rusticated, Classic Weatherboards	

# Trimtec Accessories

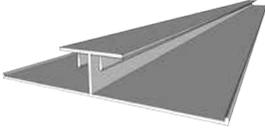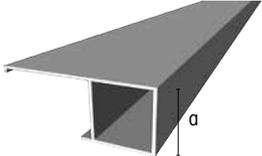PRODUCT	LENGTH (mm)	DIMENSION	SUITED TO:	
ALUMINIUM Z FLASHING	3660		Weathergroove, ExteriorBoard/High ImpactBoard Other products as required	
LONG VERTICAL ALUMINIUM JOINER	3000 3660		Selflok Weatherboards, Weathergroove, ExteriorBoard/High ImpactBoard	
ALUMINIUM DEEP CHANNEL JOINER	3660		ExteriorBoard/High ImpactBoard	
ALUMINIUM END STOP	3660 Small 3000 Large	$\alpha = 11$ Small $\alpha = 21$ Large	Selflok Weatherboards, Weathergroove, ExteriorBoard/High ImpactBoard, Primelok Weatherboards, Rusticated Classic Weatherboards	

# Trimtec Anodised Aluminium

## Storage and Handling

Anodised aluminium products should be stored in a dry and flat position away from any potentially corrosive materials. Timber or soft bearers at a distance no more than one metre apart should be used to support the product. Continuous exposure to moisture will promote corrosion.

The products are subject to damage or could damage incompatible materials they are brought in contact with. The edges and cut corners of the product can be sharp and may cause personal injury if not handled safely. Wear eye protection, gloves and protect skin when possible and when cutting avoid air borne metal fragments.

## Dimensions and Packaging

TRADITIONAL WEATHERBOARDS		LENGTH (mm)	WIDTH (mm)	UNITS PER PACK	CONTENTS m <sup>2</sup>
Classic 200		3660	197	144	103.8
Classic 300		3660	298	96	104.7
Rusticated		3660	197	144	103.8
Wall Shingles		1195	225	120	32.3
SELFLOK WEATHERBOARDS		LENGTH (mm)	WIDTH (mm)	UNITS PER PACK	CONTENTS m <sup>2</sup>
Millwood		3660	298	96	104.7
Old Colonial		3660	298	96	104.7
Ecogroove 150		3660	298	96	104.7
Ecogroove 300		3660	298	96	104.7
Texwood		3660	298	96	104.7
Vgroove 150		3660	298	96	104.7
Vgroove 300		3660	298	96	104.7
PRIMELOK WEATHERBOARDS		LENGTH (mm)	WIDTH (mm)	UNITS PER PACK	CONTENTS m <sup>2</sup>
Primelok 200		3660	197	144	103.8
Braidwood		3660	197	144	103.8
Federation		3660	170	168	104.5
Shadowood		3660	170	168	104.5
ARCHITECTURAL PANELS		LENGTH (mm)	WIDTH (mm)	UNITS PER PACK	CONTENTS m <sup>2</sup>
ExteriorBoard/ High ImpactBoard	12 x 4	3660	1220	24	107.2
	9 x 4	2745	1220	24	80.37
	8 x 4	2440	1220	24	71.4
Rubix Panel	4 x 4	1200	1200	48	69.1
	4 x 3	1200	900	48	51.8
Weathergroove	12 x 4	3660	1196	24	105.1
	9 x 4	2745	1196	24	78.8
	8 x 4	2440	1196	24	70.0

## Material Durability Properties

PROPERTY	AUSTRALIAN STANDARDS	UNIT	TYPICAL VALUES
Density	AS/NZS 4266.4	kg/m <sup>-3</sup>	990
Mass/Unit Area	AS/NZS 4266.4	kg/m <sup>2</sup>	9.4
Bending Strength	AS/NZS 4266.5	MPa	> 32
Modulus of Elasticity	AS/NZS 4266.5	MPa	4500
Moisture Content Ex-Mill	AS/NZS 4266.3	%	7.5
Hygro Expansivity	AS/NZS 4266.14	%	0.25
Moisture Resistance	AS 2457.5 – 24 Hour Submersion	% Swell	< 2
Moisture Absorption	AS 2457.5 – 24 Hour Submersion	% Absorption	< 6
Formaldehyde Emissions	AS/NZS 4266.16	mg/L	< 0.07
Formaldehyde Classification	JIS A 1460	-	F <sup>xxxx</sup> /SEO

# Weatherboards Wall Coverage Table

	CLASSIC	CLASSIC	RUSTICATED	ALL SELFLOK PROFILES	PRIMELOK BRAIDWOOD	FEDERATION SHADOWWOOD	WALL SHINGLES
Weatherboard Width	200	300	200	300	200	170	225
Weatherboard Lap	20	20	25	19	25	25	40
NUMBER OF ROWS (x)	WALL HEIGHT COVERAGE (mm)						
Approximation	= 177x + 20	= 278x + 20	= 172x + 25	= 279x + 19	= 172x + 25	= 143x + 25	= 185x + 40
1	197*	298*	197*	298*	197*	168*	225*
2	374	576	369	577	369	311	410
3	551	854	541	856	541	454	595
4	728	1132	713	1135	719	597	780
5	905	1410	885	1414	885	740	965
6	1082	1688	1057	1693	1057	883	1150
7	1259	1966	1229	1972	1229	1026	1335
8	1436	2244	1401	2251	1401	1169	1520
9	1613	2522	1573	2530	1573	1312	1705
10	1790	2800	1745	2809	1745	1455	1890
11	1967	3078	1917	3088	1917	1598	2075
12	2144	3356	2089	3367	2089	1741	2260
13	2321	3634	2261	3646	2261	1884	2445
14	2498	3912	2433	3925	2433	2027	2630
15	2675	4190	2605	4204	2605	2170	2815
16	2852	4468	2777	4483	2777	2313	3000
17	3029	4746	2949	4762	2949	2456	3185
18	3206	5024	3121	5041	3121	2599	3370
19	3383	5302	3293	5320	3293	2742	3555
20	3650	5580	3465	5999	3465	2885	3740

\*Average width

## Notes:

1. Weathertex Selflok and all Primelok profiles have set Weatherboard laps. The top row of Weatherboards may require cutting to fit to the eaves.
2. The lap on Weathertex Classic/Rusticated Weatherboards and Wall Shingles may be increased to give equal width rows over the wall height.
3. At the wall/eave intersection a timber cover strip may be fixed, equal in width to the actual lap, for a tidy finish.

## Thermal Insulation & Energy Efficiency

Weathertex cladding products offer great environmentally responsible and cost saving benefits when combined with an insulated wall systems. Including Weathertex in an insulated wall system will contribute to meeting sustainability targets under the Building Sustainability Index (BASIX) for NSW development applications and the contribute to a "Star rating" under the Nationwide House Energy Rating Scheme (NatHERS) initiative of the Australian Greenhouse Office.

A variety of simple and effective wall insulation systems are available and advice should be sought from relevant insulation manufacturers.

**Note:** For R-value calculation of a system; Weathertex Thermal conductivity = 0.195 W/mK, or R = 0.05m<sup>2</sup>K/W per 9.5mm thickness.

## Fire Resistant Properties of Weathertex

BAL RATING AS 3959	HEAT AND SMOKE RELEASE AS/NZS 3837	EARLY FIRE HAZARD INDICES AS 1530 PART 3	
Weathertex meets up to and including BAL 19 requirements	<ul style="list-style-type: none"> <li>• Average Specific Extinction Area of 63m<sup>2</sup>/kg</li> <li>• Weathertex is a Group 3 material</li> </ul>	• Ignitability Index	14
		• Spread of Flame Index	7
		• Heat Evolved Index	6
		• Smoke Developed Index	4





# Fire Rated Wall Systems - Fire Resistance Level (FRL)

WeatherTex cladding can achieve fire ratings of 60/60/60 and 90/90/90 when constructed with additional fire rated linings. WeatherTex can be conveniently installed over a wide range of fire rated wall systems detailed by the relevant system manufacturer such as CSR Gyprock and Boral.

Advice of the system manufacturer should be sought on the appropriate system for your project.

All walls must be designed for the applied loads. For loadbearing walls and walls subject to wind pressures, walls shall be designed to the appropriate Australian Standards or construction manuals. Designers should consider Axial Capacity Reduction (ACR) from charring or loss of steel strength due to heat. Guidance on structural design can be sought from the relevant FRL system manufacturer.

Standard installation requirements in this installation guide apply to the installation of the WeatherTex external cladding component. Fastener lengths must be increased by the thickness of all packing materials used between the frame and WeatherTex.

<b>Typical FRL Systems</b>	
<i>Note: Timber studs at maximum 600mm centres</i>	
<b>Direct Fix - 60/60/60*</b> <b>*ACR Group 1</b>	<b>Direct Fix - 60/60/60 and 90/90/90*</b> <b>*ACR Group 3</b>
	
<p><b>External Wall Side</b></p> <ul style="list-style-type: none"> <li>WeatherTex 9.5mm Cladding direct fix</li> <li>Vapour Permeable Membrane</li> <li>1 layer of 16mm Gyprock Fyrchek MR Plasterboard</li> </ul> <p><b>Internal Wall Side</b></p> <ul style="list-style-type: none"> <li>1 layer of 16mm Gyprock Fyrchek Plasterboard</li> </ul> <p><b>Approximate* Thermal Rating (R-value)</b>  <math>R_{(winter)} = 2.5</math> and <math>R_{(summer)} = 2.3</math>                      *using 75 Soundscreen™ 2.0 infill</p> <p><b>Approximate* Acoustic Value (R<sub>w</sub>)</b>  <math>R_w = 45</math>                      *using 75 Soundscreen™ 2.0 infill</p>	<p><b>External Wall Side</b></p> <ul style="list-style-type: none"> <li>WeatherTex 9.5mm Cladding on WeatherTex cavity battens</li> <li>Vapour Permeable Membrane</li> <li>1 layer of 16mm Gyprock Fyrchek MR Plasterboard</li> </ul> <p><b>Internal Wall Side</b></p> <ul style="list-style-type: none"> <li>1 layer of 6mm CSR CominSeal™ Wallboard</li> <li>1 layer of 16mm Gyprock Fyrchek Plasterboard</li> </ul> <p><b>Approximate* Thermal Rating (R-value)</b>  <math>R_{(winter)} = 2.5</math> and <math>R_{(summer)} = 2.3</math>                      *using 75 Soundscreen™ 2.0</p> <p><b>Approximate* Acoustic Value (R<sub>w</sub>)</b>  <math>R_w = 50</math>                      *using 75 Soundscreen™ 2.0</p>
<b>Cavity Fix - 60/60/60</b>	<b>Cavity Fix - 90/90/90</b> <b>(from outside only)</b>
	
<p><b>External Wall Side</b></p> <ul style="list-style-type: none"> <li>WeatherTex 9.5mm Cladding on cavity battens</li> <li>Vapour Permeable Membrane</li> <li>1 layer of 16mm Gyprock Fyrchek MR Plasterboard</li> </ul> <p><b>Internal Wall Side</b></p> <ul style="list-style-type: none"> <li>1 layer of 16mm Gyprock Fyrchek Plasterboard</li> </ul> <p><b>Approximate* Thermal Rating (R-value)</b>  <math>R_{(winter)} = 3.0</math> and <math>R_{(summer)} = 2.8</math>                      *using 75 Soundscreen™ 2.0</p> <p><b>Approximate* Acoustic Value (R<sub>w</sub>)</b>  <math>R_w = 42</math>                      *using 75 Soundscreen™ 2.0</p>	<p><b>External Wall Side</b></p> <ul style="list-style-type: none"> <li>WeatherTex 9.5mm Cladding on cavity battens</li> <li>Vapour Permeable Membrane</li> <li>2 layers of 13mm Gyprock Fyrchek MR Plasterboard</li> </ul> <p><b>Internal Wall Side</b></p> <ul style="list-style-type: none"> <li>1 layer of 10mm Gyprock Plasterboard CD</li> </ul> <p><b>Approximate* Thermal Rating (R-value)</b>  <math>R_{(winter)} = 2.9</math> and <math>R_{(summer)} = 2.7</math>                      *using 75 Soundscreen™ 2.0</p> <p><b>Approximate* Acoustic Value (R<sub>w</sub>)</b>  <math>R_w = 42</math>                      *using 75 Soundscreen™ 2.0</p>

Note: The timber framed and steel framed FRL systems in this guide are indicative of typical systems provided by CSR Gyprock. Application must be in accordance with the system manufacturer's installation requirements and instructions.

# General Requirements ALL PRODUCTS

The following installation instructions and guides are in addition to the requirements of the National Construction Code (NCC) - Volume 2 for Class 1 & 10 Buildings. Weathertex provides a suite of CAD drawings (refer to the Nationwide House Energy Rating Scheme (NatHERS)) which should be used in conjunction with the instructions in this installation guide. Note: All diagrams in this installation guide are for demonstration purposes only. Diagrams may omit some components for clarity.

## Storage and Handling Weathertex

Weathertex products should be stored flat, under cover and on timber bearers spaced at maximum 600mm centres. When storing Weathertex outside, keep the stack clear of the ground and cover with waterproof materials to prevent water staining.

## Cutting and Working with Weathertex

Weathertex products are easy to cut and shape with a normal hand or power saw. Weathertex may be stacked two or three high for multiple cutting. Primelok Weatherboards should be cut individually to protect the aligning spline. Where required, edges may be trimmed with a smoothing plane or sandpaper. Holes are easily drilled with high speed drills or clean cutter bits.

The normal health and safety precautions should be taken when working with wood panel products. Machine tools should be fitted with dust extractors and work areas kept clean. If dust levels exceed Worksafe Australia Standards the wearing of a dust mask (AS 1715 and AS 1716) and safety glasses (AS 1337) is recommended. Storage and work areas should be adequately ventilated. A Material Safety Data Sheet is available for download on the Weathertex website: [www.weathertex.com.au](http://www.weathertex.com.au)

## Site, Foundation and Framing

Foundation design must comply with AS 2870 "Residential Slabs and Footings - Construction" and the National Construction Code (NCC).

Timber or steel frames shall comply with the NCC. Where applicable, timber frames shall be constructed in accordance with Australian Standard 1684 - Residential Timber - Framed Construction. Steel frames must be erected in accordance with the manufacturer's requirements. Frames shall be straight and true with studs at a maximum of 600mm centres. Timber shall be seasoned, as unseasoned timber is prone to shrinkage and can cause sheets and frames to move.

## At the Base of the Wall

Lower framing timbers must be isolated from ground moisture by suitable damp-proof courses (DPC) or termite shielding. Similarly, Weatherboards or Architectural Panels must not be placed in direct contact with masonry, brickwork or concrete. Where necessary, use strips of polyethylene to isolate the materials.


**Allow at least 100mm clearance between the bottom edge of Weathertex Weatherboards or Architectural Panels from paved surfaces which are exposed to the weather and at least 225mm clearance to unprotected ground.** The grade of adjacent finished ground must slope away from the building to avoid the possibility of water accumulation.

## Moisture Management and Flashing

It is the responsibility of the Designer or Specifier to identify moisture related risks associated with any particular building design. Wall construction design must effectively manage moisture, considering both the interior and exterior environments of the building, particularly in buildings that have a high risk of wind driven rain or are artificially heated or cooled. Adequate ventilation and design consideration must ensure that the wall cavity and the back of the Weathertex board will remain dry at all times.

In addition, all wall openings, penetrations, junctions, vertical and horizontal joints, connections, window heads, sills and jambs or other components, must incorporate appropriate NCC complying flashing for waterproofing to prevent moisture exposure on the back of the Weathertex. Flashing materials and methods must comply with the requirements of relevant Australian Standards and the NCC. Failure to appropriately flash all penetrations will void the Weathertex Manufacturer's Warranty.

On walls projecting from the roof line in upper storey construction, keep the bottom edge of Weathertex Weatherboards 70mm clear of the lower storey roof claddings. Weatherproof with an approved flashing.

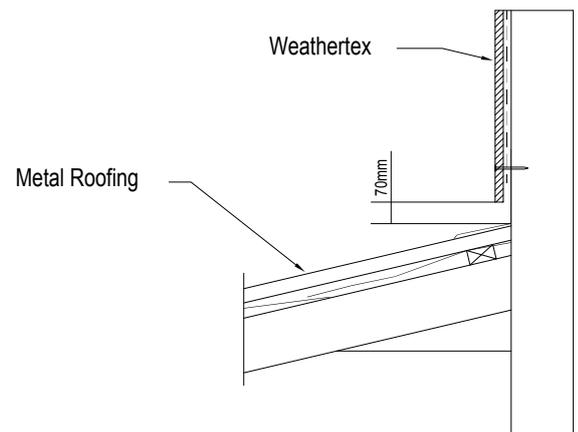

# Wall Sarking Requirements

Vapour permeable membrane must be used under all Weathertex products in accordance with AS/NZS 4200.2 "Pliable building membranes and underlays – installation" and the manufacturer's specifications.

The vapour permeable membrane allows for the controlled escape of vapour from within the building whilst restricting the ingress of liquid moisture.

The vapour permeable sarking must be in accordance with AS/NZS 4200.1 and:

- Have a LOW vapour resistance
- Provide a HIGH water barrier\*

\*sarking products are unsuitable if "unclassified" as a water barrier

Weathertex recommends the use of the Weathertex Wrapshield in conjunction with the Weathertex Cavity Installation System to provide the best protection against condensation problems such as mould, timber rot, corrosion and loss of thermal resistance.


The permeability and vapour resistance of materials should be considered in the context of their application. The designers/architects/engineer should consider strategies to mitigate condensation risks in the design with relevance to local climate conditions. Resources such as the ABCB Condensation Handbook and NATSPEC offer general information on condensation principles.

Additionally, soft compressible insulation installed directly between the front of the wall studs and Weathertex cladding can cause installation issues and is not recommended.

## Weathertex and Termites

Weathertex currently provides a warranty which protects against a variety of conditions including (but not exclusive of) the product supplied being fit for purpose, and will not rot, split or crack. In addition to this, Weathertex is warranted against termite attack, provided the following conditions are adhered to.

A termite mitigation plan complying with all local, state and federal requirements and best-practice guidelines must be in place and maintained from the time that the Weathertex is delivered to site and for the life of the product. Provided that the plan and its maintenance can be demonstrated, the normal Weathertex warranty at the time of purchase will apply to the Weathertex.

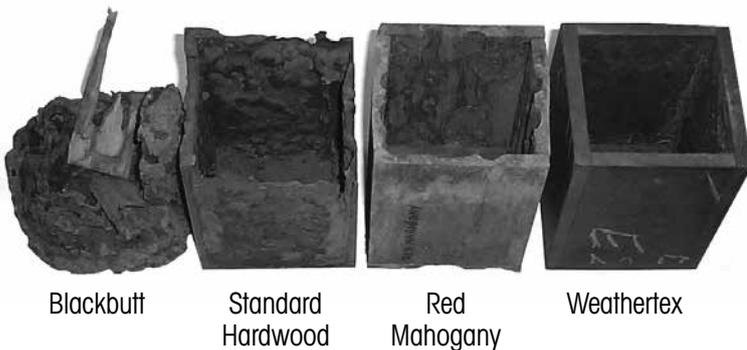

**Samples removed from Termite Test  
after 2.5 years exposure**

## National Construction Code (NCC) Compliance

All Weathertex products are made to AS/NZS 1859.4 and operations are controlled under a third party Certified ISO 9001 Quality Management System.

Weathertex meets the Deemed-to-Satisfy Provisions detailed in Part 3.5.3 Wall Cladding of the National Construction Code (NCC) Volume 2 for Class 1 & 10 Buildings. From the NCC:

### Part 3.5.3 Wall Cladding

B. Acceptable Construction Practice

3.5.3.1 Compliance with the acceptable construction practice satisfies Performance Requirements P2.1.1 and P2.2.2 for wall cladding provided:

- (b) Wall Cladding is installed in accordance with
  - (ii) 3.5.3.3 for hardboard wall cladding boards and
  - (iii) 3.5.3.4 for hardboard sheet wall cladding.

3.5.3.3 – Wall cladding boards must

- (b) for 9.5mm thick hardboard – comply with AS/NZS 1859.4

3.5.3.4 – (b) hardboard sheet wall cladding must

- (i) comply with AS/NZS 1859.4

Note: the above section is an extract from Volume 2 of the NCC 2014.

# Painting and Maintenance

Failure to follow any of the below preparation instructions may void warranty of the product.

## For Pre-Primed Products:

**ALWAYS PAINT PRIMED WEATHERTEX WEATHERBOARDS AND ARCHITECTURAL PANELS WITHIN 60 DAYS OF FIXING. FAILURE TO OBSERVE THIS REQUIREMENT MAY RESULT IN POOR ADHESION OF THE TOP COAT AND MAY VOID WARRANTY.**

## Prime cut ends:

Sawn edges must be sealed with high quality exterior acrylic primer or solvent based oil alkyd prior to installation. It is also good practice to prime any timber mouldings, including corner stops and trims.

## Surface Preparation - Cleaning & Washing:

Clean surface of primed Weatherboard Panels with soft lint free cloth and wash down with sugar soap to remove salt, dirt, dust and grease or airborne contaminants. Do not vigorously scrub the surface nor use an abrasive or strong cleaning agent as you may burnish the paint surface and mark the primer finish. Wash down with fresh water and dry the surface with one final wipe using a soft dry lint-free cloth in the direction of the paint flow.

Not allowing the house dry before painting is a common cause of paint failure. Failure to clean the surface may result in poor adhesion with topcoat and may void warranty. (Do not use high pressure washers as this can cause coating damage and water ingress into the wall cavity).

## Painting:

WeatherTex Weatherboards and Panels can be primed with exterior acrylic primer before topcoat or are suitable for direct application with an exterior grade 100% acrylic topcoat or solvent base paint system. It is recommended to apply selected coating to a test area to confirm suitability. If compatibility of the selected topcoat is an issue, the surface may be primed with a suitable exterior acrylic primer before topcoating.

Apply a minimum of two coats of paint in accordance with the paint manufacturer instructions for mixing, film build, coverage and drying between coats prior to reapplication of topcoat. Temperature and wet weather will affect curing of coatings and consideration of site conditions at the time of painting is essential to ensure proper curing and adhesion of applied coatings.

Paint colour can have an effect on the performance of timber products. As WeatherTex is a timber product, its dimensions will change with changes in moisture content. Dark paint colours can allow surfaces in warmer climates to become very hot in direct sunlight leading to loss of moisture and subsequent shrinkage of the Weatherboard. Plastic joiners can also distort at high temperature. Light paint colours will lead to better thermal efficiency of the building and minimise the effects of moisture change.

## Maintenance:

The extent and nature of maintenance will depend on the geographical location and exposure of the installation. Regularly wash the painted surface with water to remove dirt and grime and to improve the performance of the coating.

Thoroughly inspect topcoat paint work at the end of year 1 and repair areas of damage/coating breakdown according to the original paint specification or approved equivalent. Repeat inspection process at year 5 and based on the results of this condition survey make a decision on future maintenance actions, which may include touch up/repair of areas or a full recoat.

Additional basic maintenance tasks include but are not limited to controlling vegetation and garden beds close to the installation, keeping gutters and pipes clear and addressing moisture damage potential due to overflows and replacement of penetrations, flashings and sealants used in installation as required.

## For Natural (Unprimed) Products:

If the raw surface is to be treated, a good quality matt finish water based decking oil such as Cabots Aquadeck – New Natural should be used. To maintain the fresh brown appearance and prevent aging and greying, the oil must be applied and maintained according to the coating manufacturer's instructions. Apply selected oil products to a test area to confirm suitability and ensure it matches expected results for colour and surface finish.

When installed uncoated, WeatherTex natural has the characteristics of raw undressed timber and the surface will weather and grey subject to location and sun exposure. When allowed to weather naturally it may develop some small black spots on the surface. This is carbon which is inherent with the manufacturing process. These small black spots are not mould and will not affect the performance or longevity of the product.

If desired, after greying off, application of exterior grade oil as above will allow the Natural product to regain its fresh natural timber colour. Clean the wall with water to remove any dust and allow to completely dry before coating.

**NOTE:** Painting natural board with a pigmented finish will void all warranty. If a pigmented finish is to be applied, it must be onto WeatherTex's primed board.

# Fasteners

The table below displays the minimum length, gauge and head size required for fixing Weathertex products. Where applicable, refer to the High Wind Classification table when selecting a fastener.

Installers must assure themselves that the appearance of the selected fastener is suitable for the intended use. Generally, head sizes in excess of 6mm or T and D head shaped nails may not produce a satisfactory finish on face fixed profiles. For unspecified systems, fixing lengths must be increased to allow for additional packing material.

FIXING TO TIMBER FRAMES <sup>1</sup>		
PRODUCT	TYPE	MINIMUM REQUIREMENTS <sup>2</sup>
<b>DIRECT FIX:</b> CLASSIC & SHINGLES	Hand Nailing	50mm x 2.8mm Weathertex Nail, Hot-Dip Galv
	Gun Nailing	50mm x 2.5mm Ring Shank, or ND50 SS Bradnails <sup>3</sup>
	Screws	10g x 35mm Class 3
<b>DIRECT FIX:</b> SELFLOK, PRIMELOK, WEATHERGROOVE & EXTERIORBOARD/HIGH IMPACTBOARD	Hand Nailing	50mm x 2.8mm Weathertex Nail, Hot-Dip Galv
	Gun Nailing	45mm x 2.5mm Ring Shank, or ND50 SS Bradnails <sup>3</sup>
	Screws	10g x 35mm Class 3
<b>WEATHERTEX CAVITY FIX:</b> CLASSIC & SHINGLES	Hand Nailing	60mm x 2.8mm, Hot-Dip Galv
	Gun Nailing	60mm x 2.5mm Ring Shank, Hot-dip Galv
	Screws	10g x 60mm Class 3
<b>WEATHERTEX CAVITY FIX:</b> SELFLOK, PRIMELOK, EXTERIORBOARD HIGH IMPACTBOARD & WEATHERGROOVE	Hand Nailing	60mm x 2.8mm, Hot-Dip Galv
	Gun Nailing	60mm x 2.5mm Ring Shank, Hot-dip Galv
	Screws	10g x 60mm Class 3
FIXING TO STEEL FRAMES <sup>4</sup>		
PRODUCT	TYPE	MINIMUM REQUIREMENTS <sup>2</sup>
<b>20MM PINE BATTEN +</b> CLASSIC & SHINGLES	Screws	10g x 60mm Self-Drilling Class 3
<b>20MM PINE BATTEN +</b> SELFLOK, PRIMELOK, WEATHERGROOVE & EXTERIORBOARD/HIGH IMPACTBOARD	Gun Nailing	Blue Solutions 2502SG - 50mm Flat Head "Gripshank" Nails PT2000
	Screws	10g x 50mm Self-Drilling Class 3
<b>12MM POLYSTYRENE +</b> CLASSIC & SHINGLES	Gun Nailing	Blue Solutions 2502SG - 50mm Flat Head "Gripshank" Nails PT2000
	Screws	10g x 50mm Self-Drilling Class 3
<b>12MM POLYSTYRENE +</b> SELFLOK, PRIMELOK, WEATHERGROOVE & EXTERIORBOARD/HIGH IMPACTBOARD	Gun Nailing	Blue Solutions 2359N - 38mm Flat Head "Gripshank" Nails
	Screws	10g x 40mm Self-Drilling Class 3

## Notes:

1. Hardwood frames may omit the ring shank requirement for nail fasteners.
2. Minimum requirements for fasteners must be met for performance and wind zone classifications to be applicable. Where specific fasteners are listed in the table, only the specified fasteners may be used in this case. Nails **MUST NOT** be overdriven. This can reduce the holding capacity of the Weathertex.
3. Wind zone classifications for Bradnails differ from flat head gun nails. See wind zone classification table for further information.
4. Steel frame may be at minimum 0.55mm BMT. Recommended fasteners may not be applicable for steel greater than 1.2mm BMT. See section on steel frame installation.
5. All fasteners must be galvanised or suitably coated to resist corrosion for external application (Australian Standard AS 3566, Class 3 for screws). When installed in high corrosion zones such as coastal locations, fasteners (nails and screws) must be made of materials appropriate to the desired life of the system and geographical location. Stainless Steel Nails and Class 4 Screws may be necessary in these zones. The advice of the fastener supplier should be sought.
6. Drive fixings flush with the plank surface. No punching is permitted. Screws may be driven up to 2mm below the plank surface. Fill holes with a high quality proprietary grade, acrylic-based flexible paintable filler.
7. If using a smart-bit style countersinking tool; the gauge of the screw must match the gauge of the tool to prevent movement issues.

# High Wind Areas

WeatherTex direct fixing system has been subject to simulated wind suction forces at the Cyclone Testing Station, James Cook University, Townsville QLD, and in our own laboratory. When fixed as specified to timber or steel frames the WeatherTex profiles are suitable for use as shown.

FRAME	PRODUCT	Fastener	Fixing	Stud Centres(mm)	HIGHEST WIND CLASSIFICATION			
					REGIONS A & B		REGIONS C & D	
					Unlined Wall	Internally Lined	Unlined Wall	Internally Lined
<b>WEATHERTEX WEATHERBOARDS</b>								
Timber	200mm Classic, Rusticated	WeatherTex Nails	Traditional	450	N5	N5	C2	C3
				600	N4	N4	C1	C2
	Selflok Weatherboards	WeatherTex Nails	Traditional	450	N5	N5	C2	C3
				600	N4	N4	C1	C2
				450	N4	N5	N/A	N/A
				600	N3	N4	N/A	N/A
		ND50 Brad Nails	Traditional	450	N4	N5	N/A	C2
				600	N4	N4	N/A	C1
			Semi-concealed	450	N3	N4	N/A	C2
				600	N3	N4	N/A	C1
	DUO D31150	Traditional	450	N6	N6	N/A	N/A	
			600	N6	N6	N/A	N/A	
		Semi-concealed	450	N4	N5	N/A	C2	
			600	N4	N5	N/A	N/A	
Wall Shingles	WeatherTex Nails	Traditional	450	N5	N5	C2	C3	
			600	N2	N2	N/A	N/A	
0.55mm Steel	Selflok Weatherboards			450				
				600				
0.75mm Steel	Selflok Weatherboards			450				
				600				
<b>WEATHERTEX PRIMELOK WEATHERBOARDS</b>								
Timber	Federation and Shadowood	WeatherTex Nails	Traditional	450	N5	N5	C2	C3
				600	N4	N4	C1	C2
	Classic Primelok 200 and Braidwood	WeatherTex Nails	Traditional	450	N4	N4	C1	C2
				600	N2	N3	N/A	C1
0.55mm Steel				450				
				600				
0.75mm Steel	Federation and Shadowood	FAP32V5	Traditional	450	N4	N4	C1	C2
	Classic and Braidwood	FAP32V5	Traditional	450	N3	N4	C1	C2
1.2mm Steel	Classic and Braidwood	FAP32V5	Traditional	450	N4	N5	C2	C3
<b>WEATHERTEX ARCHITECTURAL PANELS</b>								
Timber	Architectural Panels - Joined ON stud	WeatherTex Nails	Traditional	450	N5	N5	C2	C3
				600	N3	N4	N/A	C2
		ND50 Brad Nails	Traditional	450	N3	N3	N/A	C1
				600	N2	N2	N/A	N/A
	Weathergroove - Joined OFF stud	WeatherTex Nails	Traditional	450	N4	N4	C1	C2
				600	N2	N3	N/A	C1
		ND50 Brad Nails	Traditional	450	N3	N4	N/A	C2
				600	N2	N3	N/A	C1
0.55mm Steel		FAP32V5	Traditional	450				
0.75mm Steel	Architectural Panels - Joined ON stud	FAP32V5	Traditional	450	N4	N5	N/A	C2
	Weathergroove - Joined OFF stud	FAP32V5	Traditional	450	N4	N5	N/A	C2
1mm Steel	Architectural Panels - Joined ON stud	DUO D31150	Traditional	450	N6	N6	N/A	N/A
				600	N6	N6	N/A	N/A

## NOTES:

1. Wind classifications are as defined in AS4055 "Wind Loads for Housing" and calculations use a local pressure factor for planks within 1200mm of the building corner.
2. Tests results have been conducted using the specific fastener stated in the table

# WeatherTex on Steel Frames

Installing WeatherTex onto a steel frame is generally similar to installing WeatherTex on a timber frame. There is however some differences of which the installer must be aware and the following section outlines the technical information unique to steel frame installation.

## Fasteners

Appropriate fasteners must be used when installing onto steel frames. See the Fasteners Section and High Wind Area Section to select the correct fastener. Do not tap home under-driven gun nails as this can break the holding power of the fastener. Incorrectly shot nails should be removed and refastened at least 15mm away from the original fastener position.

## Thermal Breaks

Since 2007 there has been a Thermal Break provision within the Energy Efficiency requirements of the NCC. The provision is included to prevent thermal bridging across the wall cavity. Thermal bridging is a leakage of heat through a conductive path such as metal framing. Thermal bridging causes a reduction in the overall R-value of the wall system, significantly reduces the efficiency of the building's heating and cooling systems and can lead to condensation problems in the wall cavity.

In accordance with the NCC a thermal break with R-value no less than 0.2 must be installed between the WeatherTex external cladding and the metal framing members to separate both elements.

When installing WeatherTex Weatherboards, thermal break battens must be installed on to all studs. When installing WeatherTex Sheets or Architectural Panels, thermal break battens must be installed onto all studs and noggings. Butt-join the stud battens leaving a 5mm gap while also leaving 20mm gaps between noggings battens.

WeatherTex recommends the following two options as suitable thermal breaks:

## Softwood Timber Battens

Softwood timber battens are easily installed to provide a suitable thermal break between WeatherTex and a steel frame. The softwood timber battens shall be 20mm deep and wide enough to cover the face of the frame. For example if 70x35mm steel frame is chosen, the battens shall be 20x35mm at suitable length.

A breather membrane must be installed between the steel frame and battens; see section on Wall Sarking Requirements. The membrane can be secured by the timber battens as they are installed along a wall. Final fixings will hold battens firmly in place but they must be temporarily fixed to the frame at 600mm centres before the cladding can be installed.

## Extruded polystyrene strips

Extruded polystyrene strips are an alternative to softwood timber battens for a thermal break solution. The extruded polystyrene strips shall be 12mm deep and wide enough to cover the face of the frame. For example if a 70x35mm steel frame is chosen, the battens shall be 12x35mm at suitable length.

A breather membrane must be installed between the steel frame and battens; see section on Wall Sarking Requirements. The membrane must be held in place temporarily, using suitable fasteners, before the battens and the WeatherTex are installed

Nails or screws cannot be used to secure expanded polystyrene strips to the frame. Instead, double-sided adhesive tape or construction adhesive is suitable to hold the strips in place on the frame. Final fixings will hold extruded polystyrene strips firmly in place.

## Cavity Closer



To protect against vermin and other material entering the cavity, the base of the cavity must be sealed using the WeatherTex Large or Small Cavity Closer. A cavity closer must be installed at the base of the wall and above window heads and inter-storey flashings. The bottom of each batten is inserted into the cavity closer.

- Use 20mm Large Cavity Closer when using 20mm timber battens
- Use 20mm Large Cavity Closer when using polystyrene strips with Primelok products
- Use 10mm Small Cavity Closer when using polystyrene strips


Fix the cavity closer to the base plate at 300mm centres. Butt-join cavity closers as required and ensure the closers are fixed in a straight, level line. It is important that the openings in the cavity closer are kept clear and unobstructed to allow free drainage and ventilation of the cavity.

# Installing Your Weathertex on a steel frame system


Once the wall has been battened out, Weathertex's product specific standard fixing instructions shall be followed to install the cladding on to the frame. In the case of installing Weathertex Primelok Weatherboards, this includes fixing a Weathertex Primelok Starter strip. The bottom edge of the starter strip must not be above the bottom edge of the cavity closer.

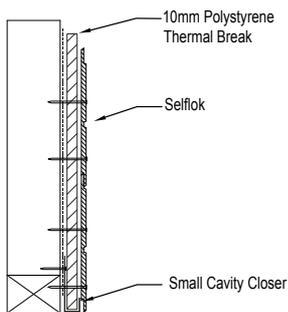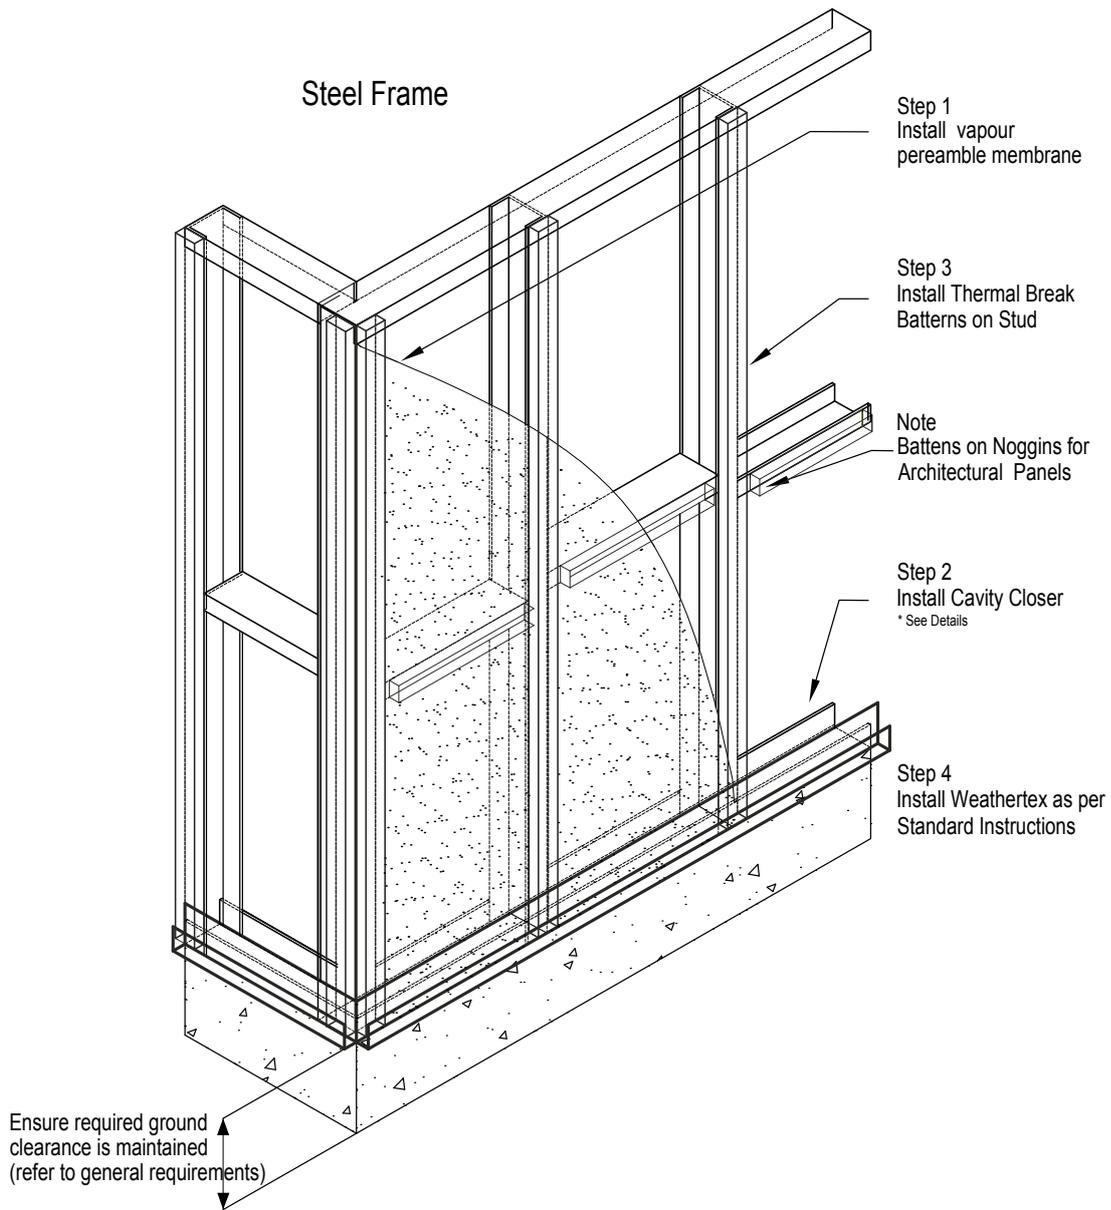


10 Polystyrene Thermal Break Selflok

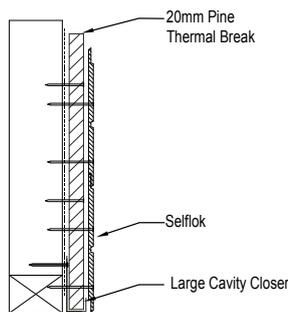

20mm Pine Thermal Break Selflok

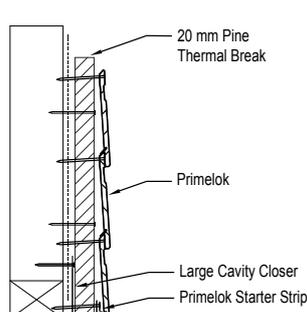

20mm Pine Thermal Break Primelok

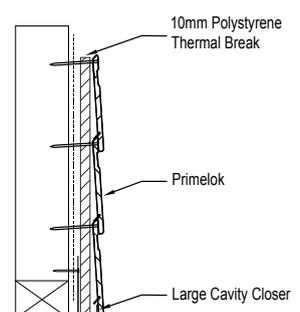

10 Polystyrene Thermal Break Primelok

# Installation CAVITY WALL SYSTEMS

To provide the best protection for your wall against moisture and mould related problems Weathertex highly recommends the use of a cavity fixing system. Fixing over the Weathertex cavity system provides the best defence for your internal lining, frame, insulation and cladding against sick home syndrome. A cavity system creates a space within the wall that allows airflow to remove any moisture that accumulates in this space either from wind driven rain or condensation.

## Preparation

Minimum requirements for fasteners must be followed when installing the Weathertex Cavity System. See the Fasteners Section when selecting appropriate fasteners.

Vapour permeable membrane must be installed between the timber frame and battens; see section on Wall Sarking Requirements. The membrane can be secured by the timber battens as they are installed along a wall.

Care should be taken when installing bulk insulation to ensure the stud cavity is not over-filled. Over filling the stud cavity with bulk insulation will impinge in the cavity created by the cavity battens and hence reduce its effectiveness, and may void warranty.

## Cavity Battens

Cavity battens provide the separation between the vapour permeable membrane on the wall frame and the cladding. Weathertex provides and recommends the use of Weathertex Cavity Battens which are 1200 x 45 x 9.5mm. Check your local regulations and/or certifiers for recommended batten thickness. If using battens other than Weathertex supplied cavity battens, fastener lengths should be increased by the batten depth.

When installing Weathertex Weatherboards cavity battens must be installed onto all studs. When installing Weathertex weatherboards or Architectural Panels, cavity battens must be installed onto all studs and noggings. Cavity battens must be fastened to framework at a minimum of 600mm centres. Butt-join the stud battens leaving a 5mm gap while also leaving 20mm gaps between noggings to allow for drainage of any moisture.

## Cavity Closer



To protect against vermin and other material entering the cavity, the base of the cavity must be sealed using the Weathertex Large or Small Cavity Closer. Designed not to interrupt airflow in the cavity, a cavity closer must be installed at the base of the wall, above window heads, inter-storey flashings and at other points where a cavity is created by the design. The bottom of the battens is inserted into the cavity closer.

- Use 20mm Large Cavity Closer for: Classic and Primelok Weatherboards
- Use 10mm Small Cavity Closer for Selflok Weatherboards, Weathergroove


Fix the cavity closer to the base plate at 300mm centres along the closer with 30 x 2.8mm flat head galvanised nails. Butt-join the cavity closers and ensure they are fixed in a straight, level line. It is important that the openings in the cavity closer are kept clear and unobstructed to allow free drainage and ventilation of the cavity.

# Installing your Weathertex on the Cavity System

Once the wall has been battened out, Weathertex's product specific standard fixing instructions shall be followed to install the cladding on to the frame. In the case of installing Weathertex Primelok Weatherboards, the Weathertex Primelok Starter strip can be omitted as the lip of the Large Cavity Closer may be used for laying the first plank.

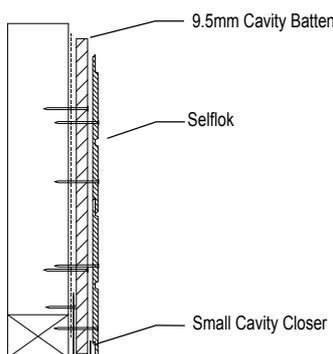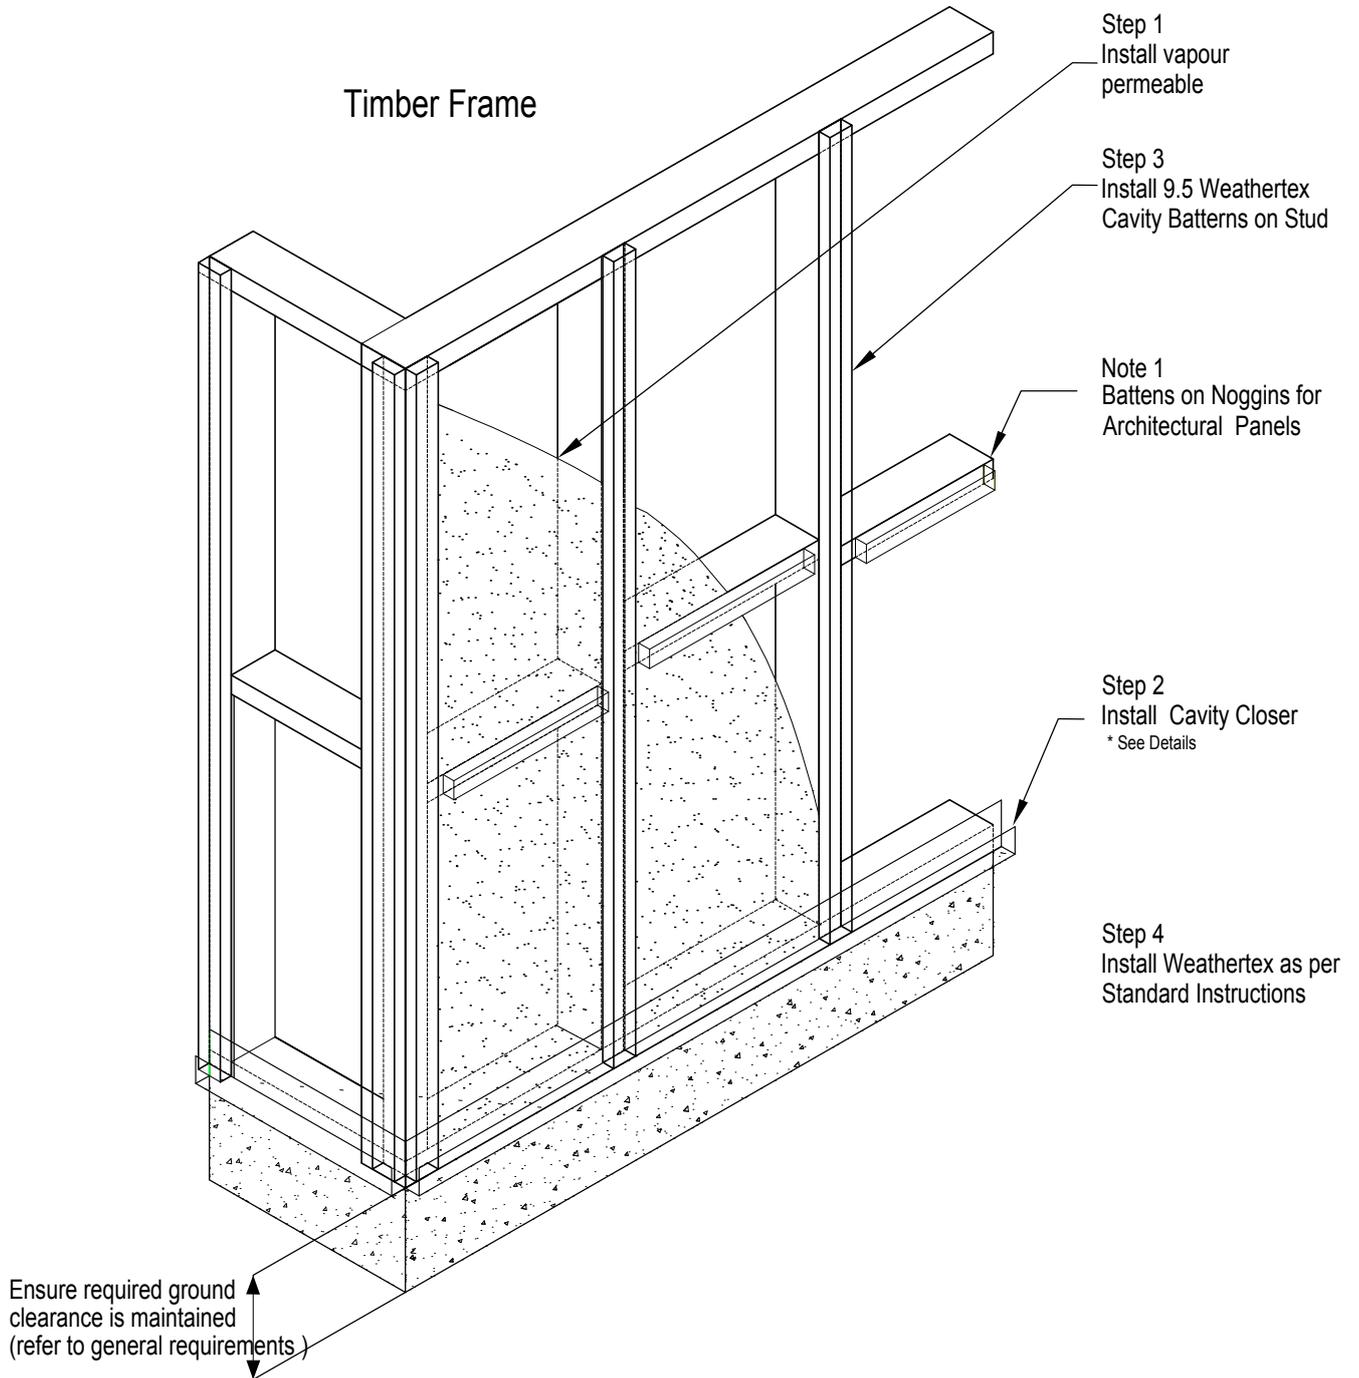

9.5mm Cavity Batten  
Selflok

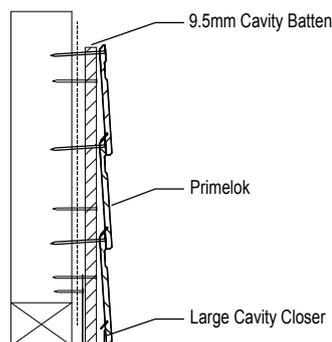

9.5mm Cavity Batten  
Primelok

# Joining Details for ALL WEATHERBOARDS

As a natural timber product, Weathertex inherently expands and contracts with changes to its moisture content. To accommodate this movement, Weathertex's traditional joiners have been designed to provide the correct spacing between adjoining planks, and cover changes in dimensions of the product.

Any cut ends must be primed with a solvent based exterior wood primer or an acrylic tannin resistant wood primer.


**NOTE:** Avoid penetrating PVC joiners with fixings during the installation process. This may cause the joiner to crack after the installation. Where necessary predrill the fixing position through the joiner prior to fixing. Also avoid positioning fixings directly opposite each other across a join as this too may cause joiner damage after installation.

## Using traditional joiners

Form joins between Weatherboard ends using the relevant joiners for the selected profile - refer to the Accessories Section. Stagger joins randomly throughout the wall with joins being formed midway between the studs. When fitting the joiner, bring the ends into moderate contact with the splayed edges or nibs within the joiner. Do not force ends tightly together. Simply cut joiners to fit at window heads, sills and eaves as required.

### Notes:

- 1) On the first row of Weathertex Rusticated remove leg gauge from the back of the joiner
- 2) To fit joiners to cut ends of Primelok Weatherboards it is necessary to trim back the plastic spline

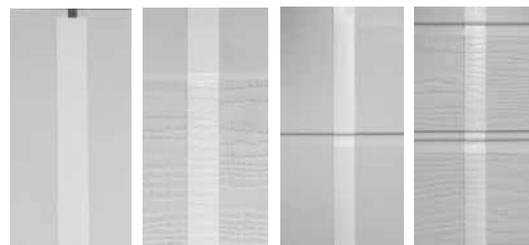


## Using Concealed Joiners

Weathertex also provides concealed joiners. Concealed joiners have been designed with a gap that will accommodate most changes in the dimensions of the product. The joiner is flashed on the rear of the Weathertex product to prevent water penetrating into the cavity.

There are two installation options when using concealed joiners:


### Option A – No Sealant:

1. Remove the spacing nibs from inside the joiner
2. Insert the primed end of the Weatherboard into the concealed joiner, resting the bottom edge on the base and locking into position under the top flange.
3. Insert the primed end of the next Weatherboard into the other side of the joiner and using a spacer, leave a 2-3mm gap between the board ends.
4. DO NOT fill the join with sealant. This will provide the best performance in cases of both expansion and contraction of the natural timber whilst maintaining a neat and discrete finish for the control join.

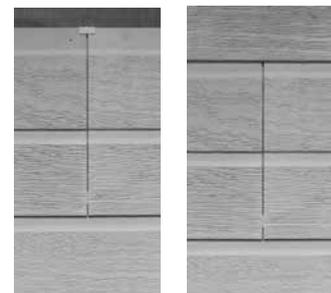


### Option B - Using Sealant

1. Insert the primed end of the Weatherboard into the concealed joiner, resting the bottom edge on the base and locking into position under the top flange. The edge of the Weatherboard should be in moderate contact with the centre nibs within the joiner. Do not force ends tightly together. The top flange will be hidden by the overlap of the board.
2. Insert the primed end of the next Weatherboard into the other side of the joiner against the centre nibs. A 6mm gap will be left when both ends are in contact with the centre nibs.
3. Fasten the Weatherboard to the wall at each stud in accordance with product requirements. Ensure nails do not pass through joiner.
4. Using a caulking gun, run a line of quality, flexible, paintable acrylic sealant up the length of the concealed joiner. Always follow the sealant manufacturer's application instructions.

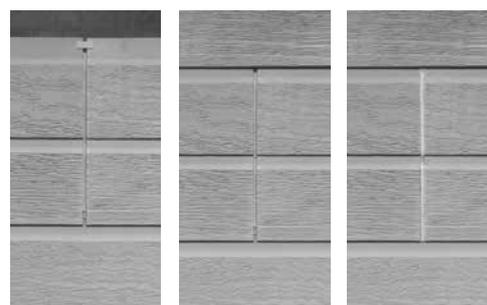

**NOTE:** When using sealant, movement in the planks may result in visible bulging or concaving of the sealant. In some cases, such as where extreme changes in moisture have occurred, the sealant may pull away from the board leaving a crack between the sealant and the board. This movement will not affect the performance or water tightness of the join, though it may be aesthetically displeasing. If this would cause an issue, Weathertex recommends the use of the traditional joiner.

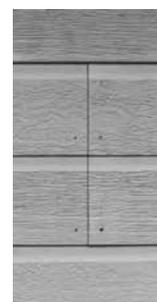

## Butt-Joining On-stud

Bring primed ends into contact leaving a 1-2mm gap, creating a control join, and fasten both ends to the stud. Movement of Weatherboards due to moisture changes may cause butt-joints to open up after installation, particularly on longer wall lengths in full sun. Weathertex recommends using the traditional joining system for wall lengths greater than 5.5m if this could present aesthetic issues.


# Alternative Joining Options for Selflok Products



Selflok Weatherboards may also be mitred at 45° and joined on stud.



Butt joints may be lined up vertically on stud and capped by a (45mm min.) timber batten, 6mm minimum control gap, and Alcor back flashing with sealant

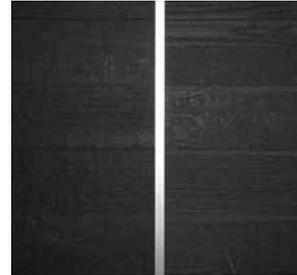


Trimtec Long Vertical Aluminium Joiner may also be used vertically.

## Corner Treatments for All Products


Trimtec Aluminium Accessories suit both Weathertex Weatherboards and Architectural Panel products and are designed to give a stylish, modern aesthetically pleasing result to your next project. Trimtec Accessories are made from versatile, lightweight anodised aluminium and can be used vertically at any junction, giving you the contemporary finish of straight lines. Refer to Accessories section at the front of this guide.

Internal and external corners, end stops and window surrounds can be fixed with hot dipped galvanised flat head nails and then permanently fixed by the Weathertex fasteners specified for each profile penetrating the flashing wings.

Aluminium, like all metals, is subject to thermal expansion and contraction. As a guide it is recognised that aluminium moves by as much as 0.1% of its length over a temperature change of 30 degrees Celsius. For this reason it is recommended that expansion gaps be used when working over lengths of greater than 6 metres. This also applies for ends which are to be brought to a rigid stop.

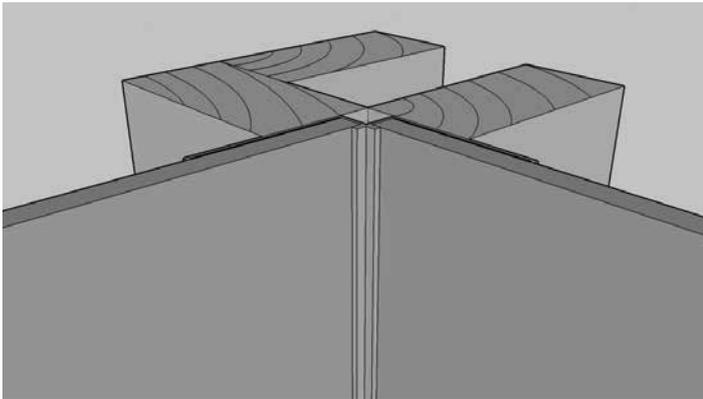


*Aluminium Internal Corner*

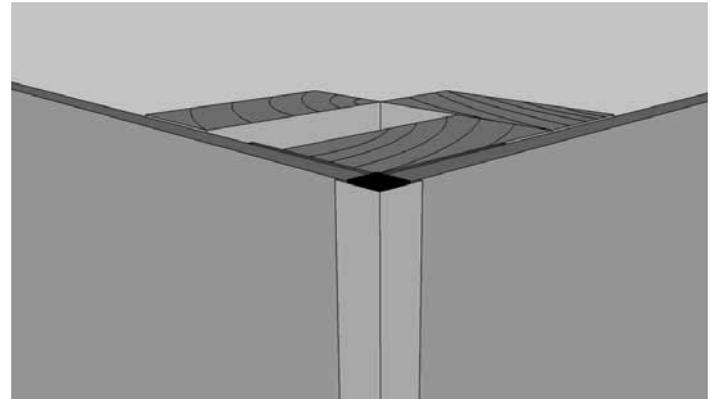

*Aluminium External Corner*

Trimtec Small and Large Window Surrounds or Small and Large End-Stops may be butted together and used to transition between flat and lapped products. Similarly Trimtec aluminium accessories may be used to transition between a Weathertex wall and other cladding systems or masonry walls. A bead of sealant should be used between the butt join.

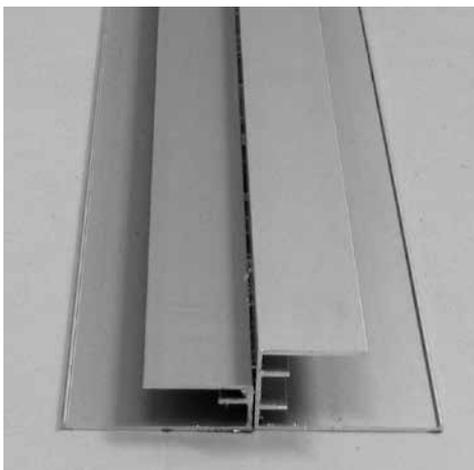

# Standard Fixing Instructions BY PRODUCT

The following product specific installation instructions are applicable to steel and timber frames for both direct fix and cavity systems. Fixing instructions are to be used in conjunction with information and requirements given in previous sections. Preparation for cavity fix and steel frame installation are given in previous sections. Additional drawing details are located on the Weathertex website ([www.weathertex.com.au](http://www.weathertex.com.au)).

## Installation OF CLASSIC WEATHERBOARDS


Set a horizontal datum or base line around the perimeter of the building. Measure the wall height from the datum and determine the number of Weatherboard rows. Minimum overlaps are 20mm for classic and 25mm for rusticated planks.

**First Row:** Fix a 35mm x 9.5mm strip of Weathertex Weatherboard 5mm up from the datum. Level the bottom edge of the Weatherboard with the datum line. Fasten the bottom edge through the Weathertex strip into the timber framing. Fit joiners as work proceeds.

**Successive Rows:** Use the storey rod, lap gauge or Joiner to position Weatherboards and maintain uniform rows. Check rows for level. At laps, fasten through both Weatherboards into the stud. One fastener per stud, located at least 12mm from edges and ends.

Drive fixings flush with the plank surface. No punching is permitted. Screws may be driven up to 2mm below the plank surface. Fill holes with a high quality proprietary grade, acrylic-based flexible paintable filler. Solvent based or two-part fillers such as epoxy are not suitable and cannot be used.

**NOTE:** Primelok weatherboards should not be fixed in this manner - see installation of Primelok weatherboards

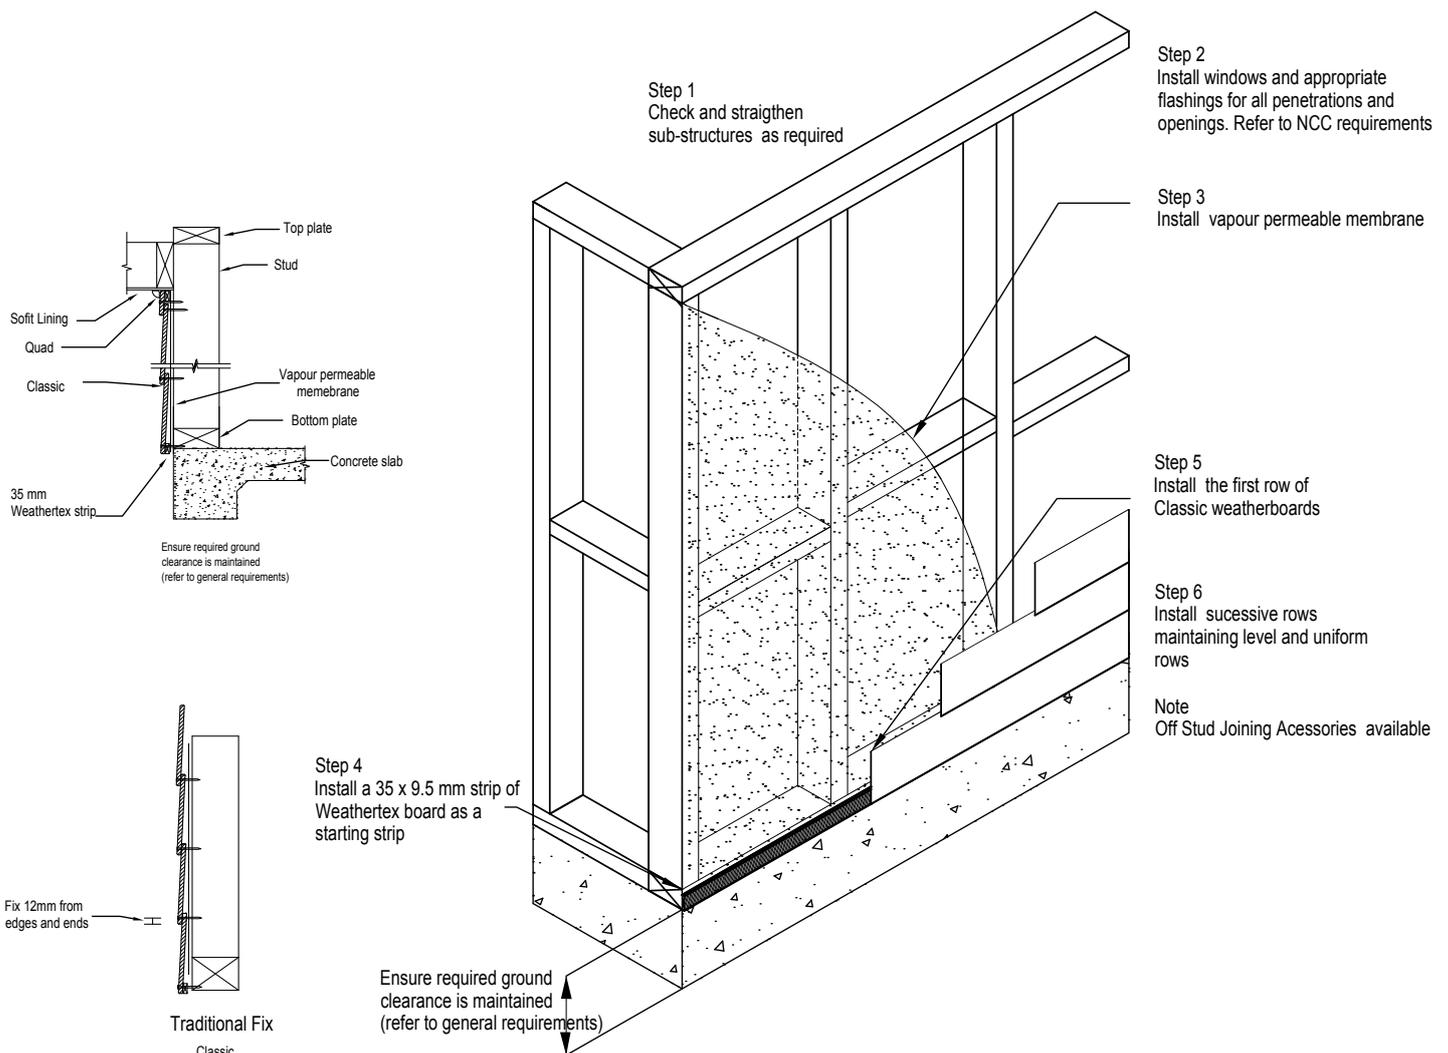


# Installation PRIMELOK WEATHERBOARDS

Set a horizontal datum or base line around the perimeter of the building. Fix the Weathertex Primelok Starter Strips to the frame butt joining successive lengths so that the bottom edge of the strips are level with datum for the full length of the wall. When installing on a Weathertex Cavity System, the Large Cavity Closer is used as a starter strip instead of the Primelok Starter Strip.

**First Row:** Position the first Weatherboard so that the spline locks over the starter strip. Press the Weatherboard down into the strip and fasten along the top edge of the board to every stud. Keep fasteners 15mm from the top edge so that they will be hidden by the overlapping board above and fit joiners as work proceeds. To fit joiners to cut ends, trim back the spline on the back of the Weatherboard using a hacksaw or sharp knife.

**Successive Rows:** Simply position each Weatherboard so that the spline locks over the splayed top edge on the preceding row. Commence fixing at one end of the Weatherboard pressing down to fully engage the boards and fix along the top edge at every stud. Alternatively, start midway along the Weatherboard and work outwards towards the ends. Keep fasteners 15mm down from the top edge so that they will be hidden by the overlapping Weatherboard and check rows for level.

Drive fixings flush with the plank surface. No punching is permitted.

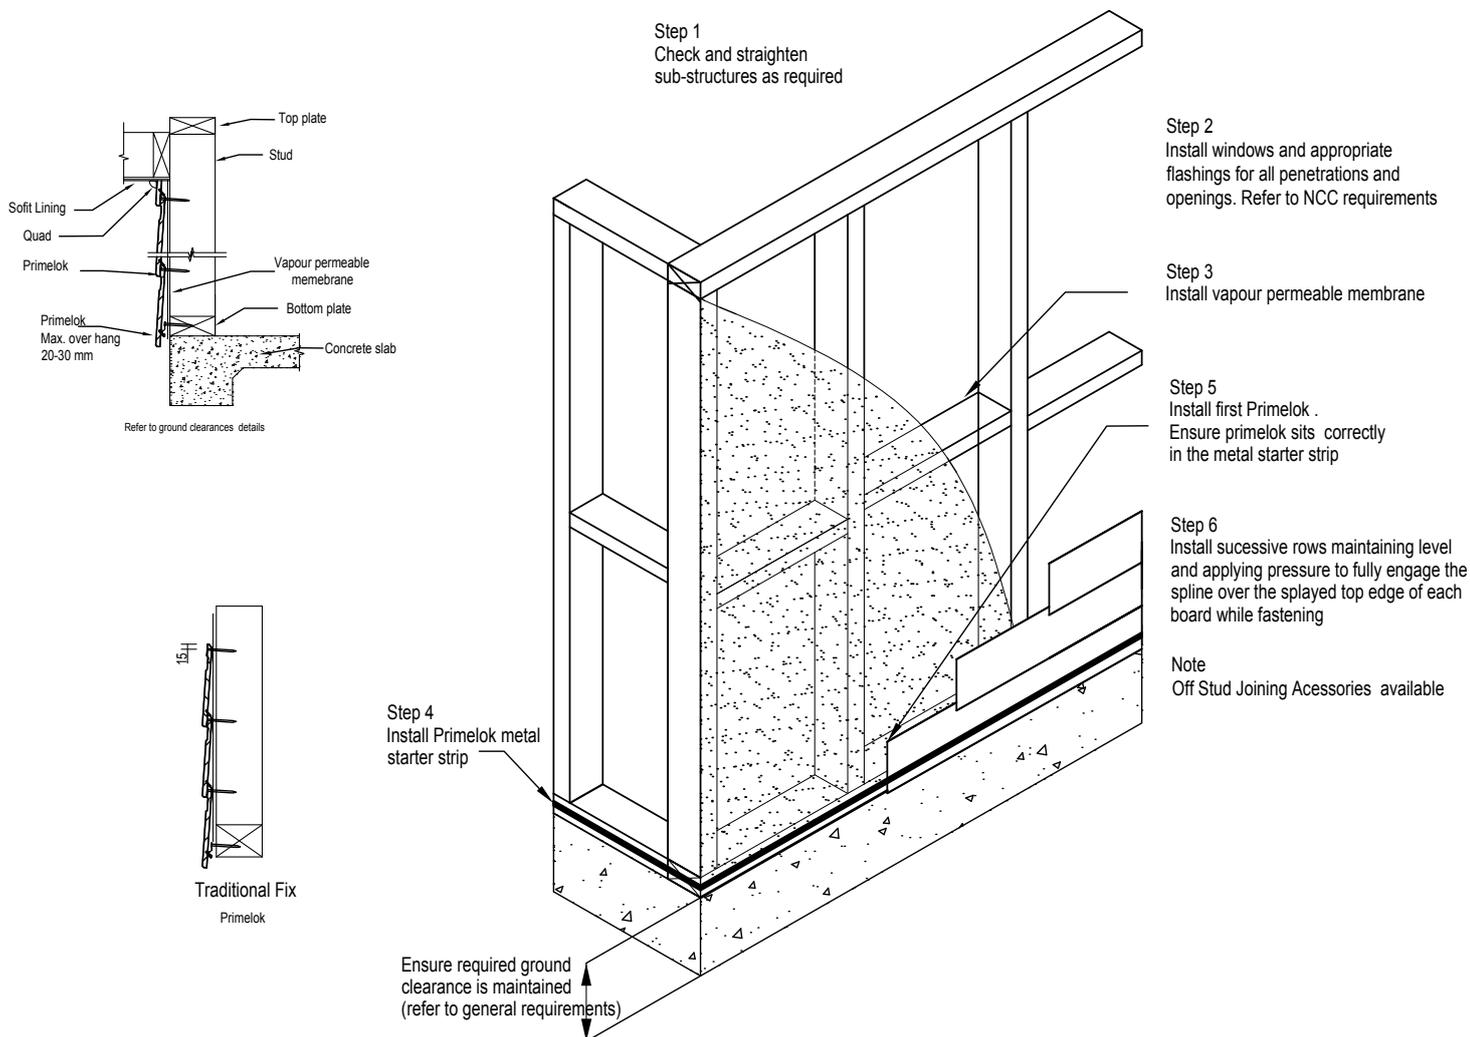

# Installation SELFLOK WEATHERBOARDS

**NOTE:** This section applies to the standard pre-primed Selflok Weatherboards. For Natural Woodsman Selflok products see the Section on the Installation of Natural Woodsman Weatherboard

## Traditional Fix

**First Row:** Set a horizontal datum or base line around the perimeter of the building. Rest the bottom edge of the first row of Weatherboards on datum line.

**Note:** for slab construction the plank may overhang the slab surface by 20-30mm. Fasten Weatherboards with two face fasteners at each stud keeping fasteners 12mm minimum from ends, 30mm up from lower Weatherboard edges and approximately 140mm apart. Fit joiners as work proceeds.

**Successive Rows:** Rest the rebated edge of Selflok Weatherboards on the row below. Ensure there is proper engagement of the Selflok by applying downward pressure while fastening. Fix with two fasteners at each stud keeping fasteners 12mm minimum from ends, 30mm up from lower Weatherboard edges and approximately 140mm apart.


Drive fixings flush with the plank surface. No punching is permitted. Screws may be driven up to 2mm below the plank surface. Fill holes with a high quality proprietary grade, acrylic-based flexible paintable filler. Solvent based or two-part fillers such as epoxy are not suitable and cannot be used.



## Selflok Semi Concealed Fix

In some Wind Areas (see Sections: Fasteners and High Wind Areas) Selflok Weatherboards can also be fixed with one fixing concealed. In this case, one fixing must be placed 30mm from the bottom edge of the plank and the second placed 15mm below the top edge of the plank. The latter fixing is concealed by the plank above when it is installed. All other factors of installation are according to Traditional Fix instructions above.

**Note:** Bradnails may not be used for Semi-Concealed fixing. Semi-concealed fixing is not appropriate for steel frame construction when using nail fasteners.

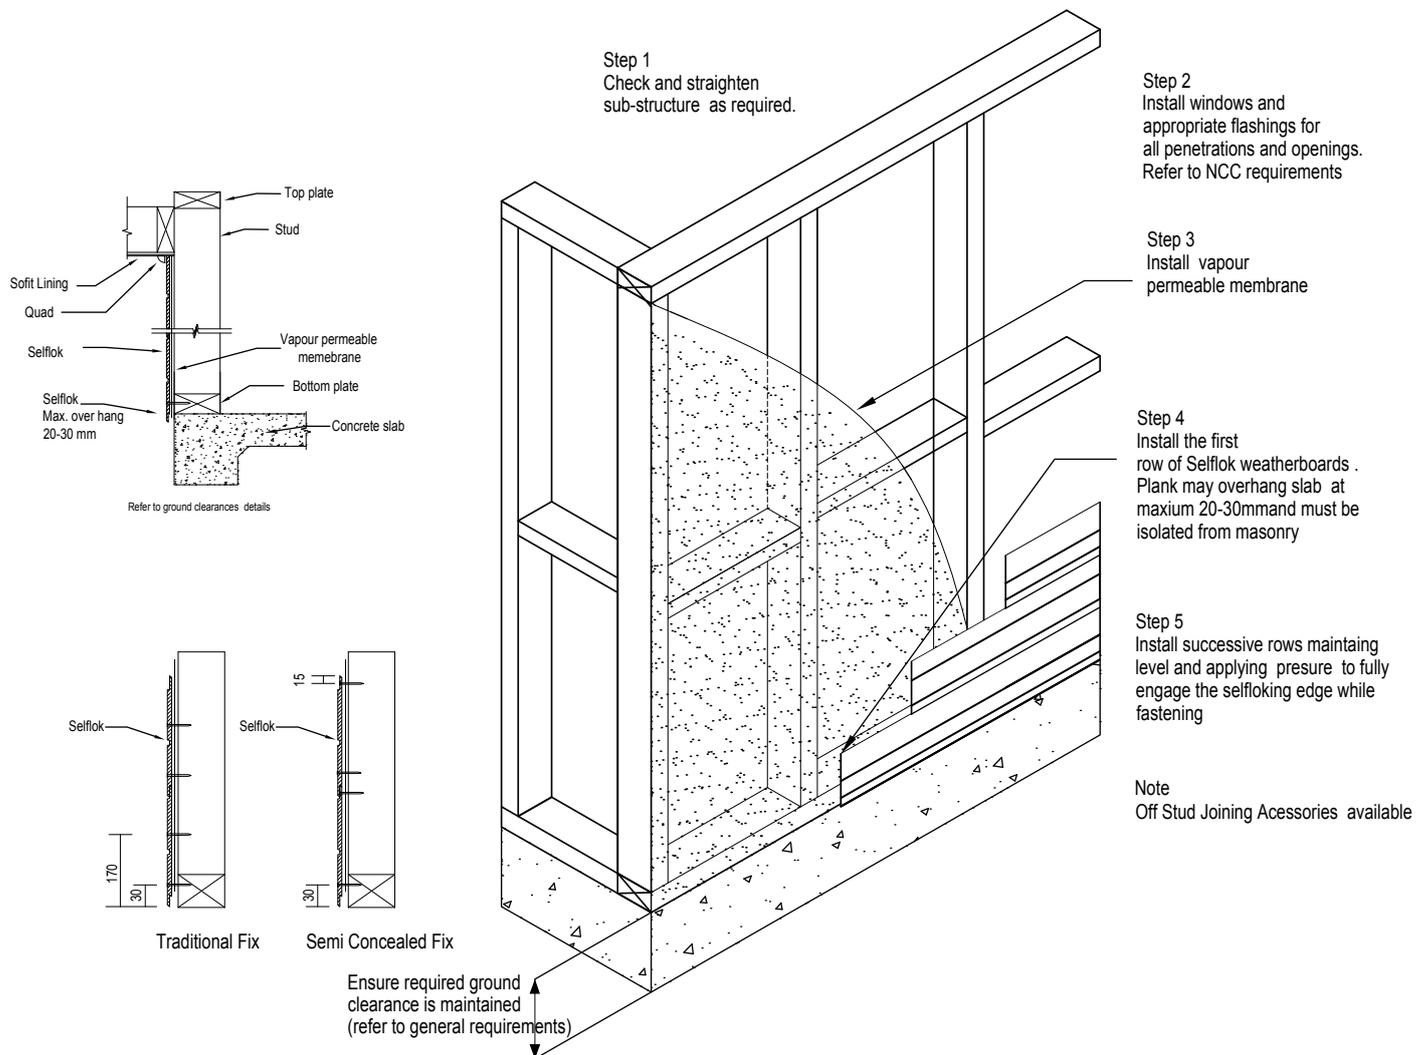

# Installation OF NATURAL WEATHERBOARD RANGE

The Natural Weatherboard Range must be fixed according to the Traditional Fix instructions above for Selflok Weatherboards. Traditional PVC joiners are not suitable for the Natural Range; Butt-Joining On-stud and "Alternative Joining Options" as detailed in the Joining Section should be used when joining Natural Weatherboard Products depending on the desired finish.



**Note:** Natural Products are composed of unsealed natural hardwood timber which may occasionally exhibit tannin bleeding. Consideration must be taken if installing unsealed Weathertex products above porous or light coloured features.

# Installation OF WALL SHINGLES

**First Row:** Set a horizontal datum line to align the first row. Allow a minimum overlap of 40mm. Fix a 35mm x 9.5mm strip of Weathertex 25mm up from the datum. Level the bottom edge of the board with the datum line. Fasten the bottom edge through the Weathertex strip into the timber framing. Fit Shingle joiners as work proceeds.

**Joining:** Form joins progressively with 6mm shingle joiners that fit the rebated ends of the board. Do not force ends tightly together. Where possible, locate joins over studs. If joining between studs, fasten each adjoining shingle to at least two studs. Stagger joins throughout the wall.

**Successive Rows:** Use the storey rod, lap gauge or Joiner to position Weatherboards and maintain uniform rows. Check rows for level. At laps, fasten through both Shingles into the stud. Use one fastener per stud, located at least 12mm from edges and ends.

Drive fixings flush with the plank surface. No punching is permitted. Screws may be driven up to 2mm below the plank surface. Fill holes with a high quality proprietary grade, acrylic-based flexible paintable filler. Solvent based or two-part fillers such as epoxy are not suitable and cannot be used.



# Installation of WEATHERGROOVE (PRE-PRIMED)

## Preparation

For general framing requirements and construction details refer to sections covered under General Requirements for All Products. The following installation instructions apply whether fixing over the Weathertex Cavity Wall System or choosing to Direct Fix to timber or steel framing.

Stud spacing may be at maximum 600mm centres. If the vertical joints are to be formed off-stud, then sheet edges must be supported with Weathergroove Joiners over noggings at 750mm maximum centres.


Establish a horizontal datum or base line at least 6mm below the base of the frame. Weathergroove must be installed with grooves in a vertical orientation. Weathertex Ecogroove planks may be suitable if horizontal grooves are required.

## Fixing Detail

Refer to the Fasteners Section in this guide for information on selecting an appropriate fastener.

Use a level to ensure the first Weathergroove sheet is vertical before fixing off. Fixings must be provided at 200mm centres to the studs and plates nearest the edge of the sheet, and 200mm centres throughout the centre of the sheet to all underlying studs and noggings. Fixing shall be no closer than 12mm from the sheet edges and must not be in the grooves of the sheets.

Drive fixings flush with the sheet surface. No punching is permitted. Screws may be driven up to 2mm below the sheet surface. Fill holes with a high quality proprietary grade, acrylic-based flexible paintable filler. Solvent based or two-part fillers such as epoxy are not suitable and cannot be used.

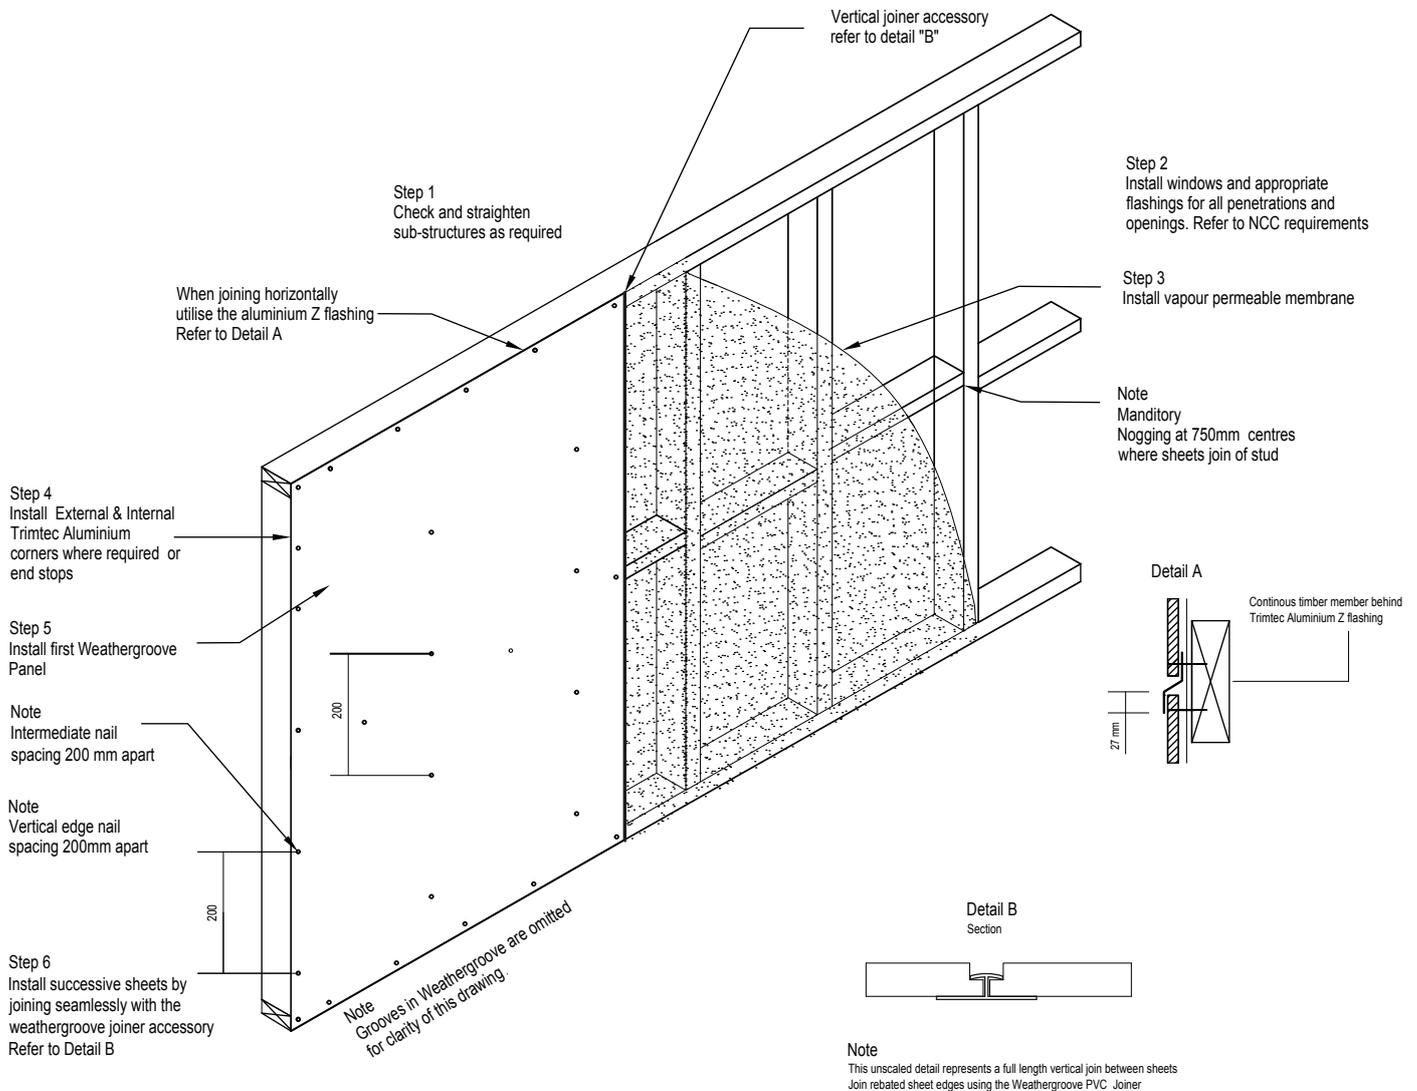

## Vertical Joining

Weathergroove has unique rebated edges and must be formed using the Weathergroove Joiner, refer to the Accessories Section. This joiner will provide the necessary clearance to accommodate movement while providing a seamless joint between panels. Where joins occur off-stud the edge of the sheets must be supported by noggings at a maximum of 750mm centres.

Avoid penetrating PVC joiners with fixings during the installation process. This may cause the joiner to crack after the installation. Where necessary pre-drill the fixing position through the joiner prior to fixing. Also avoid positioning fixings directly opposite each other across a join as this too may cause joiner damage after installation.

## Horizontal Joining

Horizontal joins must be flashed using the Aluminium Z Flashing, refer to the Accessories Section. All horizontal joins must be supported by double noggings.

**Note:** Weathergroove Woodsman shown. Direct fix method shown. In the interest of clarity cavity fixing method and vapour permeable sarking have been omitted.



Step 1

Step 2

Step 3

Step 4

# Installation OF WEATHERGROOVE NATURAL

## Preparation

For general framing requirements and construction details refer to sections covered under General Requirements for All Products.

PVC joiners are unsuitable for Natural products and Weathergroove Natural can only be butt joined on stud with an Alcor or similar flashing behind. This flashing must be fully supported. This can be achieved by using a double stud (90mm x 35mm) or by turning one standard stud on its side increasing the face size. Once the vapour permeable membrane is in place over the frame, install the Alcor or similar flashing to the double stud areas.

## Fixing Detail

Before installing the first Weathergroove Natural sheet run a 5mm bead of silicone along the length of the Alcor to seal edge of the Weathergroove sheet. When fixing the first Weathergroove Natural sheet, use a level to make sure the sheet is vertical before fixing off. Refer to the Fasteners Section in this guide for information on selecting an appropriate fastener.



Fixings must be provided at 200mm centres to the studs and plates nearest the edge of the sheet, and 200mm centres throughout the centre of the sheet to all underlying studs and noggings. Fixing shall be no closer than 12mm from the sheet edges and must not be in the grooves of the sheets. Drive fixings flush with the sheet surface. No punching is permitted. Refer to the fixing details for pre-primed Weathergroove.

## Joining

Panels should be installed with a control gap at vertical butt-joints to maintain the standard spacing of the grooves. Horizontal joins must be flashed using the Aluminium Z Flashing, refer to the Accessories Section. All horizontal joins must be supported by double noggings. Ensure the Alcor flashing for the vertical join runs under the width of the Z flashing.

# Weathergroove as STRUCTURAL BRACING

Weathergroove Panel systems have been tested for as structural bracing when direct fixed to timber framing. Data given below can be used for limit state design criteria specified in Australian Standard AS 1684-1999, Residential timber-framed construction. Tie-down fixing and other construction detail must be as specified in AS 1684 for the appropriate wind classification.

JOINING METHOD	NAIL SPACING Top & Bottom Plates (mm)	NAIL SPACING Vertical Sheet Edges (mm)	NAIL SPACING Intermediate Studs & Noggings (mm)	BRACKING CAPACITY (KN/M)	TYPE A BRACING UNITS (PER 1.2M WALL LENGTH)
ON-STUD	150	150	300	4.0	1.6
OFF-STUD	150	N/A	300	1.8	0.7

# Installation OF EXTERIORBOARD/HIGH IMPACTBOARD

ExteriorBoard/High ImpactBoard installation requires the use of the PVC or Aluminium Deep Channel Joiner. The following installation instructions MUST be followed:

1. The stud frame must be arranged so that all edges of the ExteriorBoard or High ImpactBoard and the Deep Channel Joiner are supported on double studs and double noggings. The joiner is to be centred on the studs and noggings.
2. **Any cut ends of Weathertex must be primed with a solvent-based exterior wood primer or an acrylic tannin resistant wood primer.**
3. Position the vertical Deep Channel Joiner over the entire height of the wall. Position smaller horizontal Deep Channel Joiners so that the channel meets the vertical joiner channel, but does not run across it. Channels are to run vertically without the possibility of water pooling at a junction point. The joiner should be fixed in place using 25mm flat head nails. The joiner will be held firmly in place by the sheet fixings.  
**Note: Do not fix the PVC Deep Channel Joiner with a nail gun as this will damage the joiner. Avoid penetrating PVC joiners with fixings during the installation process. This may cause the joiner to crack after the installation.** Where necessary pre-drill the fixing position through the joiner prior to fixing. Also avoid positioning fixings directly opposite each other across a join as this too may cause joiner damage after installation.
4. Prior to the placement of the sheet, run a 5mm bead of quality, flexible, paintable sealant (Silkaflex PRO 2HP or Super Seal HPR25) into the corner of the Deep Channel Joiner.
5. Push the ExteriorBoard or High ImpactBoard into the sealant so that the sealant is evenly distributed around the edges of the sheet, and the sheet fits flush with the Deep Channel Joiner. Ensure that there is enough sealant to completely fill the exposed joiner to board joint. Excess sealant extruding from the joint can be wiped/cut off before the sealant sets.
6. Commence fixing using recommended pattern. Fixings are to be positioned at spacings of 150mm around the perimeter of the sheet with fixings at 300mm centres throughout the sheet on all available studs and noggings. Fixings must be positioned a minimum 12mm from the edge of the sheet. Fixings must meet the minimum requirements detailed in the Fasteners Section of this guide. For best results, use screws with countersunk head (AS3566, Class 3), pre drill holes and provide a 2mm countersink. Fill holes with a high quality proprietary grade, acrylic-based flexible paintable filler. Solvent based or two-part fillers such as epoxy are not suitable and cannot be used.


**Note:** Deep Channel Joiners may become permanently deformed if allowed to bend. Store in a flat, sheltered position to protect the channel ribs.



Step 1



Step 2

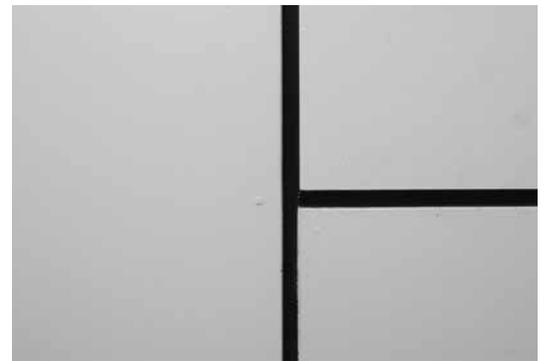

Step 3




# Installation OF RUBIX PANEL

## Preparation

For general framing requirements and construction details refer to sections covered under General Requirements for All Products. Rubix Panels have a self-locking profile and do not require any joining accessories. Panels can be joined on or off-stud with stud spacing at maximum 600mm centres. Noggings must be provided at maximum 750mm centres.


Rubix Panels may only be used on timber frame construction with a cavity wall system or steel frame construction with minimum 10mm thick thermal battens. See Weathertex Cavity Wall System or Weathertex on Steel Frames Sections for preparation instructions prior to using the following installation instructions.

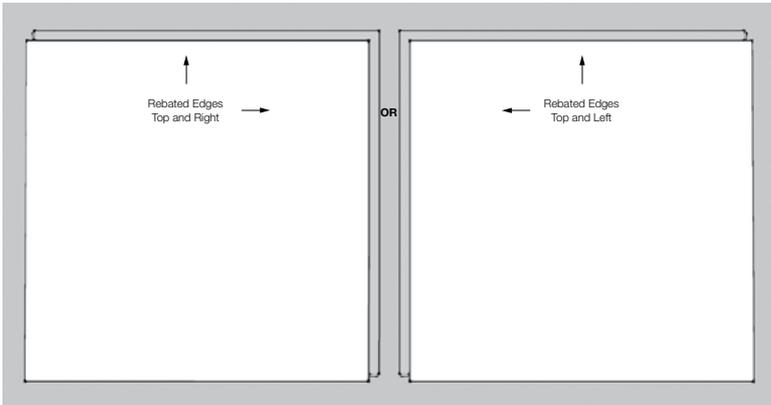

Establish a horizontal datum line where, as a minimum, the bottom edge of the sheet overhangs the bottom plate by 20mm. Plan sheet layout with the rebated faces either:

- A) at the top and the right of each sheet, or
- B) at the top and left of each sheet

The sheets must be oriented to ensure the upper sheets always overlap the face of the sheets below. Once the sheet orientation is chosen for the first panel, all sheets must be oriented in the same direction.

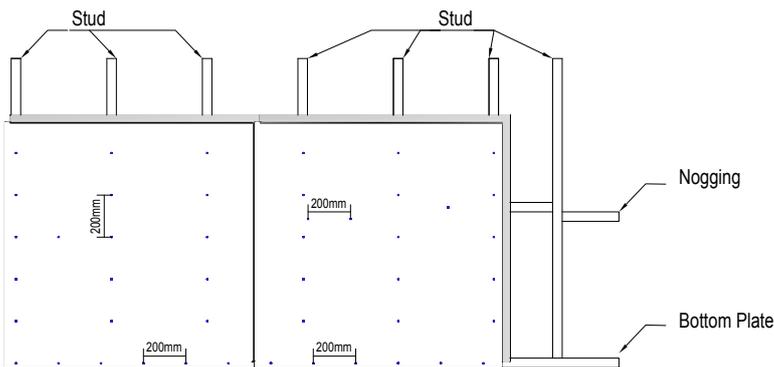


## Fixing Detail for External Installation

Refer to the Fasteners Section in this guide for information on selecting an appropriate fastener.

Fixings must be provided at 200mm centres to the studs and plates nearest the edge of the sheet, and 200mm centres throughout the centre of the sheet to all underlying studs and noggings.


Fixings must not lie within 38mm of the bottom and left edges of the sheet, and 46mm from the top and right sides of the sheet. If sheet is oriented differently, fixing positions must be adjusted accordingly

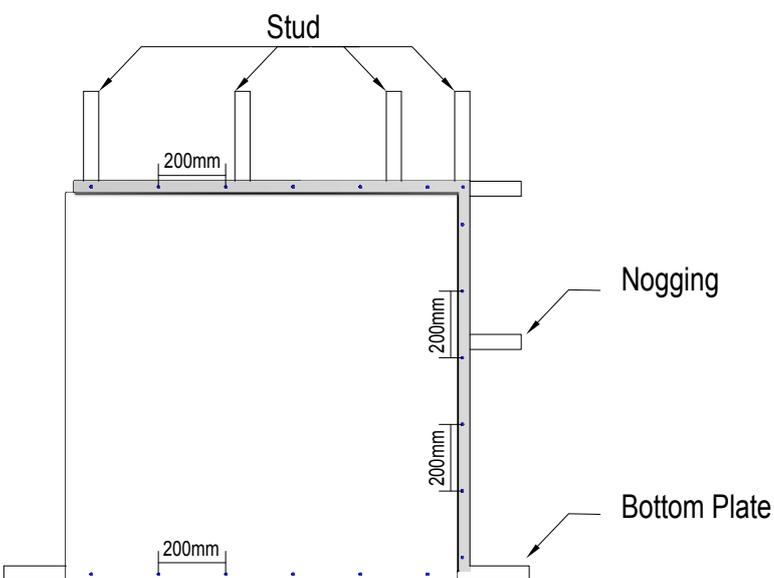

## Fixing Detail (Concealed Fix) for Internal Installation only)

When installing Weathertex Rubix Panel internally, there is the option to conceal the fixings. Fixing must be provided at 200mm centres around the perimeter of the sheet through the self-locking tongue of the panel. The first row of panels must also be fixed at 200mm centres across the base plate. Using this method, the horizontal and vertical joints must fall on studs and noggings, respectively. The fixings will then be concealed by the corresponding Self-locking section of the adjoining panels.

Note: The Primelok Starter Strip accessory may be used in lieu of the face fixings on the first row of sheets at the base plate if the application does not utilise a skirting board to conceal these fasteners.

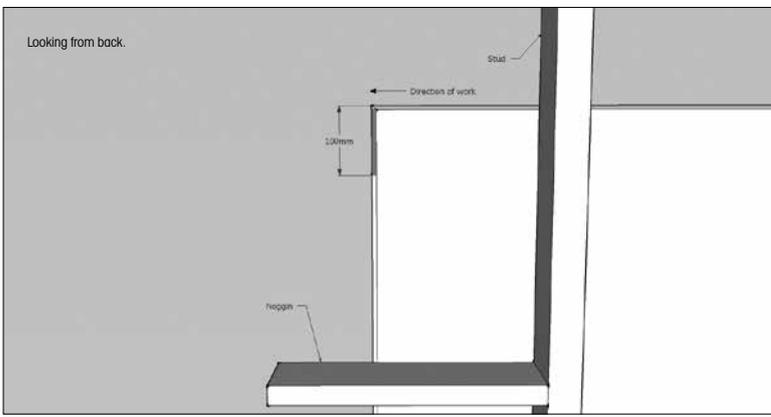

### First Row

Position first board at the corner on the datum and fix according to the relevant fixing detail above. Note: Starting position may be altered or the first board trimmed to maintain symmetry across a wall or align grooves to a specific feature. Run a 5-7mm bead of a good quality, exterior-grade, flexible polyurethane sealant along the back rebated vertical edge of the first sheet for 100mm down the leading edge of the panel from the top, outermost corner.



Bring second panel into place and ensure the Self-locking edges of the two panels fully engage. Secure each sheet as per the above fixing detail repeating for all first row sheets. Trim the last sheet to length as required.

**NOTE:** When two rows of Rubix panels meet a corner or junction with another product, a small gap may be created at the edge of the Rubix Panels where the top and bottom rows overlap. This gap should be filled with a high quality, flexible, paintable acrylic sealant as required. Alternatively, this gap can be prevented by trimming 30mm from the edge of the sheets which will meet the corner or junction prior to installation, or installing a small section of the alternate Rubix edge before installing the first panels.



### Second Row

Starting from the same side of the wall as the bottom row, run a 5-7mm bead of a good quality, exterior-grade, flexible polyurethane sealant along the back rebated edge of the first sheet for 100mm either side of the joint where two sheets below meet. This row of sealant is essential to the installation and must be maintained throughout the life of the product to prevent water ingress.



Position the first board of the second row at the corner on top of the board below ensuring the Self-locking edge fully engages. The bottom edge of the second row of Rubix Panels will overhang the top edge of the first row. Fix as per fixing instructions for the first row of panels.

Repeat for the subsequent panels of the second row fix as per the first row and sealing horizontally as above and vertically as for the first row.



## MANUFACTURER'S WARRANTY

1. Weathertex Pty Ltd A.B.N 67 084 713 986 ("Weathertex") warrants that the Products supplied are of first quality, free from material defect in materials, design and workmanship, and in conformity with the technical specifications detailed in the published Weathertex Installation Guide that is current at the date of purchase. This statutory warranty applies for a period of 12 months from the date of purchase in addition to the following clauses.
2. **Natural Board** - Weathertex warrants that its Natural (Brown) Board Products will not rot, split or crack for a period of 7 (seven) years from the date of purchase when installed and maintained in accordance with Weathertex's current published materials.

**Pre Primed Exterior Board/High Impact Board and Rubix Panel** - Weathertex warrants that its Exterior Board Products will not rot, split or crack for a period of 10 (ten) years from the date of purchase when installed and maintained in accordance with Weathertex's current published materials.

**Pre Primed Board** - Weathertex warrants that its pre primed board Products will not rot, split or crack for a period of 25 (twenty-five) years from the date of purchase when prepared, installed and maintained in accordance with Weathertex's current published materials.

3. A reference to Products in these warranty terms and conditions does not include accessory products listed "Accessories" in the Weathertex Price List ("Accessory Products"). Weathertex warrants that the Accessory Products will be free from defect in material and workmanship for a period of 7 years from the date of purchase. For the purposes of clarity, the warranties provided in clause 1 and 2 do not apply to Accessory Products.
4. The benefits to the purchaser given by the warranties set out in clauses 1 to 3 are in addition to other rights and remedies of the purchaser under Australian Consumer Law in relation to the Weathertex products and accessories.

## CONDITIONS OF THE WARRANTY

5. The warranties provided in clauses 1, 2 and 3 are only available to the original purchaser ("Purchaser") who provides Weathertex with proof of purchase and who makes the claim in writing within 30 days from the point in time when the defect becomes apparent or should have become apparent.
6. Weathertex will not be liable for any warranty claims made under clauses 1 and 2 if any of the following apply:

(a) the Products are not installed used or maintained in accordance with applicable instructions and/or specifications, including installation and site conditions provided by Weathertex (including the published Weathertex Installation Guide that is current at the date of purchase);

(b) the building in which the Products are installed does not comply with all relevant Building Codes and Regulations, Standards, and Council/Authority/Regulator requirements;

(c) the Purchaser has not complied with any service instructions which Weathertex may give or any subsequent request as to a modification of the Products which Weathertex may make from time to time in writing;

(d) the defect is caused by the use of materials, parts or accessory products that are not supplied, recommended, or approved by Weathertex;

(e) the Products are not maintained, prepared or installed by authorised installation contractors in circumstances where Weathertex has directed the Purchaser to ensure that the Products are maintained, prepared or installed by such authorised installation contractors; or

(f) the repair, rectification or replacement of the Products is required as a result of normal wear and tear or necessitated in whole or in part by the fault or negligence of any person other than Weathertex.

7. Further to clause 6 and without limiting clause 6, Weathertex under no circumstances will be liable for any claims, damages, or defects arising from or in any way attributable to:

(a) acts of God, fire, flood or other severe weather conditions or unusual climatic conditions;

(b) performance of paint/coatings applied to the Products;

(c) development of any algae, bacteria or fungi on the Products (whether on the exposed or unexposed surfaces);

(d) poor workmanship; or

(e) any other losses or damages (whether direct or indirect) including properly damage or personal injury, consequential loss, economic loss or loss of profits arising in contract or negligence.

8. The Product is subject to natural variation in finish and presentation as a result of the manufacturing process. The purchaser / builder / installer must ensure the Product meets aesthetic expectations prior to installation. Subject to the terms and conditions of this warranty, after installation of the Product, Weathertex is not liable for claims arising from aesthetic surface variations if such variations were, or would upon reasonable inspection have been apparent prior to the installation.

## REMEDIES

9. Should the Purchaser's warranty claim made under clauses 1 and/or 2 be valid within the relevant warranty period, then the remedy provided by Weathertex will be limited to either of the following (where possible) as chosen by Weathertex:

(a) Weathertex replacing the Products provided the claim is accepted by Weathertex and subject to such replacement Products being available in the manufacturing inventory at the time the claim is accepted by Weathertex. Otherwise, Weathertex will provide such replacement Products when they become available.

(b) Weathertex repairing the Products provided the claim is accepted by Weathertex.

10. Should the Purchaser's warranty claim made under clause 3 be valid, then the remedy provided by Weathertex will be limited to Weathertex replacing the Accessory Products provided the claim is accepted by Weathertex and subject to such replacement Accessory Products being available in the manufacturing inventory at the time the claim is accepted by Weathertex. Otherwise, Weathertex will provide such replacement Accessory Products when they become available.
11. The Purchaser is not entitled to any other remedies (that is apart from the remedies detailed in clauses 8 and 9) with respect to a warranty claim under clauses 1, 2 or 3.
12. This warranty cannot be relied upon by any other person and is not transferable.
13. Any replacement works will be conducted in accordance with the Building Codes and Regulations, Standards, and Council/Authority Regulator requirements applicable at the time of construction. Where the Building Codes and Regulations, Standards, and Council/ Authority Regulator requirements have changed after the Products were purchased, Weathertex will not be responsible for any costs associated with ensuring that the replacement works comply with the updated Building Codes and Regulations, Standards, and Council/Authority Regulator requirements.
14. Where an approved claim requires re-coating of the Products the Purchaser acknowledges and agrees to accept minor colour variations between the existing or original colour and the re-coated replacement Products or rectification areas.
15. Except as provided for in these terms and to the fullest extent permitted by law, all terms, statements, warranties and conditions whether express, implied, statutory or otherwise, relating to the Products, the Accessory Products, the subject matter of these terms or to these terms generally are excluded. Nothing contained herein excludes or modifies any rights the Purchaser may have under the Australian Competition and Consumer Act 2010 (or equivalent in other countries as determined by Weathertex in its sole discretion).

## DISCLAIMER

16. Recommendations made by Weathertex are based on good building practice and are not a complete statement of all relevant data. As the installation of the Products is influenced by and relies on factors outside the control of Weathertex, Weathertex assumes no responsibility for works/systems used in connection with the installation of the Products and their suitability to satisfy relevant Building Codes and Regulations, Standards, and Council/Authority /Regulator requirements.
17. Unless specifically stated otherwise, the warranties under clauses 1, 2 and 3 apply only to Weathertex products purchased and installed according to the Weathertex Installation Guide in Australia, New Zealand and the Weathertex International Installation Guide.

## AUSTRALIAN CONSUMER LAW

18. Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

## MAKING WARRANTY CLAIMS

19. The claimant (being the Purchaser) must make all warranty claims in writing. The claimant must be the original purchaser of the Weathertex product and must retain the purchase receipt (in relation to the purchase of the product) as proof of purchase. Proof of purchase must be provided to Weathertex as part of the warranty claim.

Warranty claims (and claims for reasonable costs and expenses in making the claim as referred to in clause 18) can be addressed to Weathertex by post, fax or via e-mail as follows:

The Manager  
Weathertex Pty Ltd  
PO Box 21  
Raymond Terrace NSW 2324  
Phone 1800 040 080  
Fax 1800 647 926  
E-mail sales@weathertex.com.au

20. Weathertex will respond to all warranty claims. This response may include an inspection by a Weathertex representative of the installed Product. The claimant will bear all costs and expenses of making the claim. However reasonable costs and expenses will be reimbursed to the claimant in the event that the claim is accepted by Weathertex.

As of 26th February 2015.







AAD Build, Selfok Ecogroove 300 Natural Woodsman and Weathergroove Smooth.



\*Refer to the Weathertex Manufacturer's Warranty Conditions



Weathertex is made in Australia by Weathertex Pty Ltd ABN 67 084 713 986, Masonite Road, Raymond Terrace, NSW 2324

The information in this manual related to Weathertex's product as developed and manufactured at the time of printing. Importantly, Weathertex follows a policy of continuous product testing and improvement. For this and other reasons Weathertex reserves the right to make any changes or modifications to this manual and any other relevant document as and when it considers necessary and without notice. Accordingly, users of Weathertex's products are encouraged to regularly contact Weathertex to obtain the current manual. Last reviewed May 2015.